



XCMG

— 2021 —

Product Line Brochure

XCMG FOR YOUR SUCCESS

Products

- Hoisting Machinery
- Earthmoving Machinery
- Mining Machinery
- Road Building Machinery
- Sanitation Machinery
- Concrete Machinery
- Special Vehicles
- Piling Machinery
- Heavy-duty Trucks
- Emergency Rescue Vehicle
- Others

Under our policy of continuous product development and improvement, we reserve the right to change specifications and design without prior notice. Featured machines in photos may include additional equipment. Consult your XCMG dealer for available options and attachments.

For more complete information on XCMG products, dealer services and industry solutions, visit us on the web at www.xcmg.com

XCMG, XCMG for Your Success and www.xcmg.com, as well as corporate and product identity used herein are trademarks of XCMG and may not be used without permission.

Ref. No.XCMG210201P English
Printed in China 2021.02
XCMG



WeChat



Website



E-business



XUZHOU CONSTRUCTION MACHINERY GROUP IMP. & EXP. CO., LTD



XCMG Headquarters, Xuzhou Economic Development Zone,
Jiangsu, China 221004



(+86-516) 87739230



XCMG Regional Departments:

America (+86-516) 87739285 87739551 87739710
Africa (+86-516) 87735009 87739222 87739283
Asia-Pacific (+86-516) 87739128 87739500 87739529
Central Asia (+86-516) 87739236 87739239 87739538
Europe (+86-516) 87739703 87739218 87739537
West Asia & North Africa (+86-516) 87739702 87739202 87739223



export@xcmg.com



www.xcmg.com
www.xcmgexport.en.alibaba.com



XCMG BRIEFING

XCMG, an iconic brand of construction machinery industry in China, was born in 1943 at the No.8 Arsenal Factory in southern Shandong. Since 1989 when it was designated as the reform pilot of corporate groups in China, XCMG has remained No.1 in China's industry of construction machinery. At present, it ranks No. 4 in the world and is one of the World Top 500 brands.

XCMG owns more than 60 enterprises in complete vehicles, parts and components, trade and new business forms, covering 8 business sectors in construction machinery, mining machinery, heavy-duty trucks, sanitation equipment, core parts and components, fabricated buildings, financial services and information technology.

As the pioneer and leader of construction machinery industry in China, XCMG is largest construction machinery manufacturer with longest history in China that supplies the most diverse product lineup, core parts and components. It is also the most innovative and international manufacturer with the largest export volumes.

In the 1950s and 1960s, XCMG produced the first construction machinery in China, including cranes and road rollers, which contributed to the construction projects in the newly-established China. Nowadays, XCMG has more than 100 of industry's first and top machinery in China, e.g., the world's largest crane and China's largest excavator. Besides, XCMG also has 9 championship enterprises and products in 5 business sectors. The market shares of its 9 product categories take the first place in China, among which its mobile crane has the world's largest share. Besides, its complete sets of concrete machinery and piling machinery have their market shares taking the first two places in the world.

XCMG has the national-level key laboratory and industrial design center. It has China's best national-level corporate R&D center. XCMG has successfully built the Hanyun Industrial Internet Platform and entered top three in the industrial Internet field. It was awarded as the national-level intelligent manufacturing benchmark enterprise and pilot project. Besides, it has two national-level green factory and one national model enterprise of green supply chain management. Its products are exported to 187 countries and regions. It has R&D centers, manufacturing facilities and KD factories in more than 10 countries such as Germany, Brazil, the United States, and India. Moreover, XCMG has acquired three European companies such as Schwing in Germany. It has invested more than RMB 3 billion in 97% of the countries along the Belt and Road. Its annual export and overseas revenues take the first place in China in the industry.

Adhering to the core values of "taking great responsibilities, acting with great morals and making great achievements", XCMG assumes social responsibility. It has been awarded the title of "Hero Collective for Earthquake Relief and Disaster Relief" by the CPC Central Committee, the State Council and the Central Military Commission. For twice, it has won the China Industry Award, which is the highest honor in the industry in China. Besides, XCMG has won the National Quality Award and National Model Enterprise for Harmonious Labor Relations.

On December 12, 2017, General Secretary Xi Jinping visited XCMG and fully affirmed XCMG's achievements. He highly praised XCMG as a very important and successful modern group. Xi believed that XCMG, with a glorious history, will have a better future.

XCMG will never forget its original mission of serving the country. XCMG will, on the basis of becoming a Top Four construction machinery manufacturer in the world in 2020, strive to enter top three in the world industry and become one of Fortune Top 500 companies in the world. To this end, XCMG will make utmost efforts to become the world's first-class company with global competitiveness.



Hoisting Machinery



Mining Equipment



Road Building Machinery



Concrete Machinery



Piling Machinery



Crane jib unit



CNC plate bending machine



Automated flexible assembly line



Modern XCMG automobile assembly line



Modern takt pull assembly line



The equipment with advanced power & free chain

XCMG MARKETING NETWORK





























HOISTING MACHINERY

● TRUCK CRANE

 <p>XCT8L4_1 Max. Total Rated Lifting Load: 8t Max. Load Moment of Base Boom: 318kN·m Dead Weight in Travel State: 13100kg Rated Power: 103kw/2500rpm</p>	 <p>XCT12L4_1 Max. Total Rated Lifting Load: 12t Max. Load Moment of Base Boom: 510kN·m Dead Weight in Travel State: 17100kg Rated Power: 162kw/2200rpm</p>	 <p>XCT16_1 Max. Total Rated Lifting Load: 16t Max. Load Moment of Base Boom: 735kN·m Dead Weight in Travel State: 23300kg Rated Power: 180kw/2300rpm</p>	 <p>XCT16_Y Max. Total Rated Lifting Load: 16t Max. Load Moment of Base Boom: 730kN·m Dead Weight in Travel State: 23300kg Rated Power: 192kw/2200rpm</p>	 <p>QY20K_Y Max. Total Rated Lifting Load: 20t Max. Load Moment of Base Boom: 860kN·m Dead Weight in Travel State: 26100kg Rated Power: 192kw/2200rpm</p>	 <p>XCT25L4_S Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 961kN·m Dead Weight in Travel State: 28000kg Rated Power: 192kw/2200rpm</p>
 <p>XCT25L4_Y Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 958kN·m Dead Weight in Travel State: 27500kg Rated Power: 192kw/2200rpm</p>	 <p>XCT25L4_SR Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 961kN·m Dead Weight in Travel State: 28000kg Rated Power: 192kw/2200rpm</p>	 <p>XCT25L5_2 Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 1249kN·m Dead Weight in Travel State: 34000kg Rated Power: 235kw/1900rpm</p>	 <p>XCT25L5_SR Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 986kN·m Dead Weight in Travel State: 30000kg Rated Power: 192kw/2300rpm</p>	 <p>XCT25L5_Y Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 958kN·m Dead Weight in Travel State: 27500kg Rated Power: 192kw/2200rpm</p>	 <p>XCT25L5_S Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 986kN·m Dead Weight in Travel State: 31000kg Rated Power: 245/1900W/r/min</p>
 <p>XCT30_Y Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 969kN·m Dead Weight in Travel State: 28700kg Rated Power: 192/2200kW/r/min</p>	 <p>XCT30_M Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 969kN·m Dead Weight in Travel State: 28000kg Rated Power: 192/2200kW/r/min</p>	 <p>XCT30_S Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 1132kN·m Dead Weight in Travel State: 30000kg Rated Power: 245/1900W/r/min</p>	 <p>QY40KC_1 Max. Total Rated Lifting Load: 40t Max. Load Moment of Base Boom: 1600kN·m Dead Weight in Travel State: 39000kg Rated Power: 251kw/1900rpm</p>	 <p>XCT35_U Max. Total Rated Lifting Load: 35t Max. Load Moment of Base Boom: 484000lb·ft</p>	 <p>XCT40U Max. Total Rated Lifting Load: 40t Max. Load Moment of Base Boom: 708000lb·ft Dead Weight in Travel State: 66100kg</p>
 <p>XCT50_Y Max. Total Rated Lifting Load: 50t Max. Load Moment of Base Boom: 2009kN·m Dead Weight in Travel State: 46100kg Rated Power: 247kw/2200rpm</p>	 <p>XCT50_M Max. Total Rated Lifting Load: 50t Max. Load Moment of Base Boom: 2009kN·m Dead Weight in Travel State: 42300kg Rated Power: 247kw/2200rpm</p>	 <p>XCT55_S Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2009kN·m Dead Weight in Travel State: 48500kg Rated Power: 278kw/2200rpm</p>	 <p>XCT60L5 Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 2205kN·m Dead Weight in Travel State: 46000kg Rated Power: 268kw/1900rpm</p>	 <p>XCT60_Y Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 2009kN·m Dead Weight in Travel State: 41700kg Rated Power: 247kw/2200rpm</p>	 <p>XCT60_M Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 2009kN·m Dead Weight in Travel State: 42000kg Rated Power: 247kw/2200rpm</p>
 <p>XCT70_S Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2033kN·m Dead Weight in Travel State: 44000kg Rated Power: 258kw/1900rpm</p>	 <p>XCT75_S Max. Total Rated Lifting Load: 75t Max. Load Moment of Base Boom: 3173kN·m Dead Weight in Travel State: 45000kg Rated Power: 288kw/1900rpm</p>	 <p>XCT80L6_1 Max. Total Rated Lifting Load: 80t Max. Load Moment of Base Boom: 3381kN·m Dead Weight in Travel State: 48000kg/50000kg Rated Power: 297kw/1900rpm</p>	 <p>XCT80_Y Max. Total Rated Lifting Load: 80t Max. Load Moment of Base Boom: 2587kN·m Dead Weight in Travel State: 46000kg Rated Power: 268kw/2100rpm</p>	 <p>XCT80_S Max. Total Rated Lifting Load: 80t Max. Load Moment of Base Boom: 3175kN·m Dead Weight in Travel State: 49000kg Rated Power: 278kw/2000rpm</p>	 <p>XCT85_M Max. Total Rated Lifting Load: 85t Max. Load Moment of Base Boom: 3173kN·m Dead Weight in Travel State: 46000kg Rated Power: 247kw/2200rpm</p>
 <p>XCT100_M Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 3528kN·m Dead Weight in Travel State: 48000kg Rated Power: 290kw/1900rpm</p>	 <p>XCT100_1 Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 4939kN·m Dead Weight in Travel State: 54990kg Rated Power: 356kw/1900rpm</p>	 <p>XCT110_1 Max. Total Rated Lifting Load: 110t Max. Load Moment of Base Boom: 4939kN·m Dead Weight in Travel State: 54990kg Rated Power: 356kw/1900rpm</p>	 <p>XCT130_1 Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom: 5200kN·m Dead Weight in Travel State: 54990kg Rated Power: 366kw/1900rpm</p>	<h2>● ALL TERRAIN CRANE</h2>  <p>XCA1600 Max. Total Rated Lifting Load: 1600t Max. Load Moment of Base Boom: 31360kN·m Dead Weight in Travel State: 92000kg Rated Power: (482.2/1800)/(295/1800)kW/r/min</p>	

 <p>XCA60 Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 1858kN·m Dead Weight in Travel State: 36000kg Rated Power: 250/1900kW/r/min</p>	 <p>XCA60_E Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 1858kN·m Dead Weight in Travel State: 36000kg Rated Power: 280/1700kW/r/min</p>	 <p>XCA100_E Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 300kN·m Dead Weight in Travel State: 48000kg Rated Power: (340/1700)/(129/2200)kW/r/min</p>	 <p>XCA100_S Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 2628kN·m Dead Weight in Travel State: 48000kg Rated Power: (324/1900)/(149/2200)kW/r/min</p>	 <p>XCA200 Max. Total Rated Lifting Load: 200t Max. Load Moment of Base Boom: 6664kN·m Dead Weight in Travel State: 54990kg Rated Power: 400kw/1900rpm</p>	 <p>XCA220_S Max. Total Rated Lifting Load: 220t Max. Load Moment of Base Boom: 7333kN·m Dead Weight in Travel State: 59000kg Rated Power: 361.1/1800kW/r/min</p>
 <p>XCA130L7 Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom: 5145kN·m Dead Weight in Travel State: 54990kg Rated Power: 356kw/1900rpm</p>	 <p>XCA130_E Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom: 4463kN·m Dead Weight in Travel State: 60000kg Rated Power: 360/1900kW/r/min</p>	 <p>XCA180 Max. Total Rated Lifting Load: 180t Max. Load Moment of Base Boom: 5598kN·m Dead Weight in Travel State: 60000kg Rated Power: 356/1900kW/r/min</p>	 <p>XCA200 Max. Total Rated Lifting Load: 200t Max. Load Moment of Base Boom: 6664kN·m Dead Weight in Travel State: 54990kg Rated Power: 400kw/1900rpm</p>	 <p>XCA220_S Max. Total Rated Lifting Load: 220t Max. Load Moment of Base Boom: 7333kN·m Dead Weight in Travel State: 59000kg Rated Power: 361.1/1800kW/r/min</p>	 <p>XCA230 Max. Total Rated Lifting Load: 230t Max. Load Moment of Base Boom: 7333kN·m Dead Weight in Travel State: 54990kg Rated Power: 400kw/1800rpm</p>
 <p>XCA260 Max. Total Rated Lifting Load: 260t Max. Load Moment of Base Boom: 8300kN·m Dead Weight in Travel State: 64000kg Rated Power: 400kw/1900rpm</p>	 <p>XCA300-I Max. Total Rated Lifting Load: 300t Max. Load Moment of Base Boom: 9966kN·m Dead Weight in Travel State: 55000kg Rated Power: 480kw/1800rpm</p>	 <p>XCA400 Max. Total Rated Lifting Load: 400t Max. Load Moment of Base Boom: 12340kN·m Dead Weight in Travel State: 55000kg Rated Power: 482.2kw/1800rpm</p>	 <p>XCA460 Max. Total Rated Lifting Load: 460t Max. Load Moment of Base Boom: 13360kN·m Dead Weight in Travel State: 55000kg Rated Power: 482.2kw/1800rpm</p>	 <p>XCA500 Max. Total Rated Lifting Load: 500t Max. Load Moment of Base Boom: 15000kN·m Dead Weight in Travel State: 84000kg Rated Power: 480kw/1800rpm</p>	 <p>XCA550_1 Max. Total Rated Lifting Load: 550t Max. Load Moment of Base Boom: 16500kN·m Dead Weight in Travel State: 84000kg Rated Power: 482.2kw/1800rpm</p>

 <p>QAY650A Max. Total Rated Lifting Load: 650t Max. Load Moment of Base Boom: 19500kN·m Dead Weight in Travel State: 94000kg Rated Power: (482.2/1800)/(295/1800)kW/r/min</p>	 <p>XCA750 Max. Total Rated Lifting Load: 750t Max. Load Moment of Base Boom: 22500kN·m Dead Weight in Travel State: 78000kg Rated Power: (480/1800)/(295/2200)kW/r/min</p>	 <p>XCA1200_1 Max. Total Rated Lifting Load: 1200t Max. Load Moment of Base Boom: 35280kN·m Dead Weight in Travel State: 89000kg Rated Power: (482.2/1800)/(260/1800)kW/r/min</p>	 <p>XCR30 Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 985.8kN·m Dead Weight in Travel State: 27400kg Rated Power: 152/2000kW/r/min</p>	 <p>XCR30_S Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 985.8kN·m Dead Weight in Travel State: 27400kg Rated Power: 152kw/2000rpm</p>	 <p>XCR30_Y Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 985.8kN·m Dead Weight in Travel State: 27490kg Rated Power: 162kw/2000rpm</p>
---	---	---	--	--	---

 <p>XCR35 Max. Total Rated Lifting Load: 35t Max. Load Moment of Base Boom: 1296kN·m Dead Weight in Travel State: 30657kg Rated Power: 162/2000kW/r/min</p>	 <p>XCR35_Y Max. Total Rated Lifting Load: 35t Max. Load Moment of Base Boom: 1396kN·m Dead Weight in Travel State: 30657kg Rated Power: 162kw/2000rpm</p>	 <p>XCR35_S Max. Total Rated Lifting Load: 35t Max. Load Moment of Base Boom: 1396kN·m Dead Weight in Travel State: 30657kg Rated Power: 162kw/2000rpm</p>	 <p>XCR55L4 Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN·m Dead Weight in Travel State: 40215kg Rated Power: 162/2200kW/r/min</p>	 <p>XCR55L4_M Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN·m Dead Weight in Travel State: 40215kg Rated Power: 162kw/2200rpm</p>	 <p>XCR55L5 Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN·m Dead Weight in Travel State: 41600kg Rated Power: 162kw/2200rpm</p>
 <p>XCR55L5_E Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 1950kN·m Dead Weight in Travel State: 41600kg Rated Power: 192/2200kW/r/min</p>	 <p>XCR55L5_Y Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN·m Dead Weight in Travel State: 41600kg Rated Power: 162kw/2200rpm</p>	 <p>XCR55L5_S Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN·m Dead Weight in Travel State: 41600kg Rated Power: 162kw/2200rpm</p>	 <p>XCR55L5_M Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN·m Dead Weight in Travel State: 41600kg Rated Power: 162kw/2200rpm</p>	 <p>XCR60L5_U Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 1499832 lb·ft Dead Weight in Travel State: 27400kg Rated Power: 280/2200kW/r/min</p>	 <p>XCR70 Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN·m Dead Weight in Travel State: 44055kg Rated Power: 192/2000kW/r/min</p>
 <p>XCR70_E Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN·m Dead Weight in Travel State: 44055kg Rated Power: 192/2000kW/r/min</p>	 <p>XCR70_Y Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN·m Dead Weight in Travel State: 44055kg Rated Power: 192kw/2000rpm</p>	 <p>XCR70_S Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN·m Dead Weight in Travel State: 44055kg Rated Power: 192/2000kW/r/min</p>	 <p>XCR70_M Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN·m Dead Weight in Travel State: 44055kg Rated Power: 192kw/2000rpm</p>	 <p>XCR75_U Max. Total Rated Lifting Load: 75t Max. Load Moment of Base Boom: 1496218 lb·ft Dead Weight in Travel State: 27400kg Rated Power: 260kw/2000rpm</p>	 <p>XCR90 Max. Total Rated Lifting Load: 90t Max. Load Moment of Base Boom: 29480kN·m Dead Weight in Travel State: 53489kg Rated Power: 192/2000kW/r/min</p>
 <p>XCR90_M Max. Total Rated Lifting Load: 90t Max. Load Moment of Base Boom: 2940kN·m Dead Weight in Travel State: 53489kg Rated Power: 192kw/2000rpm</p>	 <p>XCR100_U Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 209659 ft·lb Dead Weight in Travel State: 117600 lb Rated Power: 280/2200kW/r/min</p>	 <p>XCR120 Max. Total Rated Lifting Load: 120t Max. Load Moment of Base Boom: 3567kN·m Dead Weight in Travel State: 70048kg Rated Power: 221/2200kW/r/min</p>	 <p>XCR130_U Max. Total Rated Lifting Load: 257938 lb Max. Load Moment of Base Boom: 2632 ft·lb Dead Weight in Travel State: 154428 lb Rated Power: 300/2200kW/r/min</p>		

● CRAWLER CRANE

 <p>XGC100-I Rated power: 198kw/2000rpm Operating weight: 78.7t Max total rated lifting load: 100t Max load moment of base boom: 360t·m</p>	 <p>XGC55 rated power: 199kw/2000rpm operating weight: 46.3t max total rated lifting load: 55t max load moment of base boom: 203.5t·m</p>	 <p>XGC75 rated power: 199kw/2000rpm operating weight: 61t max total rated lifting load: 75t max load moment of base boom: 341t·m</p>	 <p>XGC85 rated power: 199kw/2000rpm operating weight: 71.5t max total rated lifting load: 85t max load moment of base boom: 341t·m</p>	 <p>XGC130-I Rated Power: 200kW/1800rpm Operating weight: 121.1t Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom: 702t·m</p>	
 <p>XGC88000(4000t) Rated power: 3 X 641kw/2100rpm Operating weight: 45000t Max total rated lifting load: 4000t Max load moment of base boom: 88000t·m</p>	 <p>XGC100 Rated power: 200kw/1800rpm Operating weight: 104.5t Max total rated lifting load: 100t Max load moment of base boom: 575.4t·m</p>	 <p>XGC100A Rated power: 198kw/2000rpm Operating weight: 78.7t Max total rated lifting load: 100t Max load moment of base boom: 420t·m</p>	 <p>XGC150 Rated power: 200kw/1800rpm Operating weight: 154t Max total rated lifting load: 150t Max load moment of base boom: 927.4t·m</p>	 <p>XGC150-IA Rated power: 200kw/1800rpm Operating weight: 132t Max total rated lifting load: 150t Max load moment of base boom: 940t·m</p>	 <p>XGC180-I Rated power: 243kw/1800rpm Operating weight: 132t Max total rated lifting load: 180t Max load moment of base boom: 1050t·m</p>
 <p>XGC200A Rated power: 243kw/1800rpm Operating weight: 191t Max total rated lifting load: 200t Max load moment of base boom: 1239t·m</p>	 <p>XGC260-I Rated power: 243kw/1800rpm Operating weight: 220t Max total rated lifting load: 200t Max load moment of base boom: 145t·m</p>	 <p>XGC300-I Rated power: 247kw/1900rpm Operating weight: 260t Max total rated lifting load: 300t Max load moment of base boom: 185t·m</p>	 <p>XGC320 Rated power: 247kw/1900rpm operating weight: 260t max total rated lifting load: 320t max load moment of base boom: 1870t·m</p>	 <p>XGC350 Rated power: 338kw/1900rpm Operating weight: 280t Max total rated lifting load: 350t Max load moment of base boom: 2295t·m</p>	 <p>XGC400-I Rated power: 338kw/1900rpm Operating weight: 350t Max total rated lifting load: 400t Max load moment of base boom: 5200t·m</p>
 <p>XGC2100W Rated power: 480kw/1800rpm Operating weight: 525t Max total rated lifting load: 110t Max load moment of base boom: 220t·m</p>	 <p>XGC11000(650t) Rated power: 420kw/1800rpm Operating weight: 1050t Max total rated lifting load: 6</p>				

● HAMMERHEAD TOWER CRANE




XGA6013-8S
Jib length/Tip load:
6000mm/1300kg
Rated Load Moment: 1000KN · m
Max. Lifting Capacity: 8000kg

XGA6012-6S
Jib length/Tip load:
6000mm/1200kg
Rated Load Moment: 800KN · m
Max. Lifting Capacity: 6000kg

XGA6020-8S
Jib length/Tip load:
6000mm/1500kg
Rated Load Moment: 1250KN · m
Max. Lifting Capacity: 8000kg

XGA615-8S
Jib length/Tip load:
6500mm/1500kg
Rated Load Moment: 1250KN · m
Max. Lifting Capacity: 8000kg

● TOPLESS TOWER CRANE

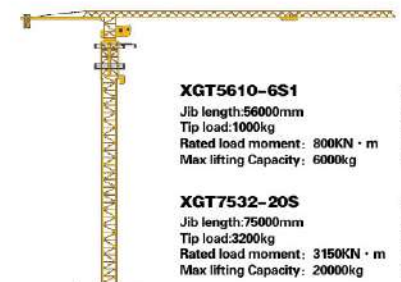


XGT5610-6S1
Jib length/6000mm
Tip load: 1000kg
Rated load moment: 800KN · m
Max. Lifting Capacity: 6000kg

XGT5613-6S1
Jib length/6000mm
Tip load: 1300kg
Rated load moment: 1000KN · m
Max. Lifting Capacity: 6000kg

XGT5732-20S
Jib length/7500mm
Tip load: 2200kg
Rated load moment: 3150KN · m
Max. Lifting Capacity: 20000kg

XGT8072-50S
Jib length/Tip load:
8000mm/7200kg
Rated Load Moment: 9000KN · m
Max. Lifting Capacity: 50000kg

● CONSTRUCTION HOIST

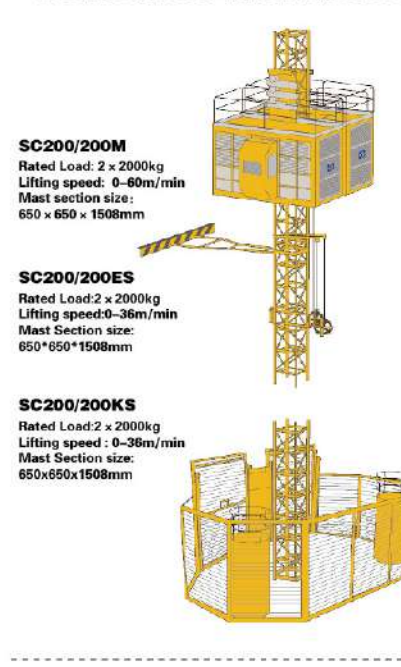

SC200/200M
Rated Load: 2 x 2000kg
Lifting speed: 0-60m/min
Mast section size:
650 x 650 x 1508mm

SC200/200ES
Rated Load: 2 x 2000kg
Lifting speed: 0-36m/min
Mast section size:
650 x 650 x 1508mm

SC200/200KS
Rated Load: 2 x 2000kg
Lifting speed: 0-36m/min
Mast section size:
650 x 650 x 1508mm

EARTHMOVING MACHINERY

● CRAWLER EXCAVATOR

XE135B Operating weight: 13000kg Bucket capacity: 0.52m³ Rated power: 72.7/2200kw/rpm	XE215C Operating weight: 21500kg Bucket capacity: 1.0m³ Rated power: 128.5/2100kw/rpm	XE235C Operating weight: 23500kg Bucket capacity: 1.0m³ Rated power: 128.5/2100kw/rpm	XE265C Operating weight: 25500kg Bucket capacity: 1.2m³ Rated power: 135.5/2150kw/rpm	XE335C Operating weight: 33800kg Bucket capacity: 1.5m³ Rated power: 190.5/2000kw/rpm	XE370CA Operating weight: 36600kg Bucket capacity: 1.6m³ Rated power: 190.5/2000kw/rpm	XE215CLL Operating weight: 22350kg Bucket capacity: 0.4m³ Rated power: 128.5/2100kw/rpm	XE260CLL Operating weight: 27500kg Bucket capacity: 0.4m³ Rated power: 128.5/2100kw/rpm
XE15U Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power: 9.8/2300kw/rpm	XE17U Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power: 11.8/2300kw/rpm	XE35U(Stage 3A) Operating weight: 4220kg Bucket capacity: 0.12m³ Rated power: 21.4/2400kw/rpm	XE55DA Operating weight: 5750kg Bucket capacity: 0.21m³ Rated power: 35/2200kw/rpm	XE60DA Operating weight: 8010kg Bucket capacity: 0.23m³ Rated power: 36.2/2100kw/rpm	XE65DA Operating weight: 8150kg Bucket capacity: 0.25m³ Rated power: 36.2/2100kw/rpm	XE75DA Operating weight: 7400kg Bucket capacity: 0.33m³ Rated power: 42.4/2000kw/rpm	XE80DA Operating weight: 7730kg Bucket capacity: 0.33m³ Rated power: 46.3/2200kw/rpm
XE135D Operating weight: 13200kg Bucket capacity: 0.52m³ Rated power: 88/2200kw/rpm	XE155D/XE155DK Operating weight: 14600kg Bucket capacity: 0.81m³ Rated power: 93/2200kw/rpm	XE200DA Operating weight: 21200kg Bucket capacity: 0.93m³ Rated power: 135/2050kw/rpm	XE215DA Operating weight: 21900kg Bucket capacity: 1.05m³ Rated power: 135/2050kw/rpm	XE225DK Operating weight: 21900kg Bucket capacity: 1.14m³ Rated power: 140/2000kw/rpm	XE245DK Operating weight: 25500kg Bucket capacity: 1.3m³ Rated power: 150/2050kw/rpm	XE270DK Operating weight: 26500kg Bucket capacity: 1.4m³ Rated power: 160/2050kw/rpm	XE305D Operating weight: 30500kg Bucket capacity: 1.4m³ Rated power: 169/2050kw/rpm
XE335DK Operating weight: 33500kg Bucket capacity: 1.6m³ Rated power: 202/2100kw/rpm	XE370D Operating weight: 36800kg Bucket capacity: 1.7m³ Rated power: 212/2000kw/rpm	XE380DK Operating weight: 38200kg Bucket capacity: 1.9m³ Rated power: 214/2100kw/rpm	XE400DK Operating weight: 39400kg Bucket capacity: 2.1m³ Rated power: 222/2100kw/rpm	XE470D Operating weight: 46900kg Bucket capacity: 2.2m³ Rated power: 250/2000kw/rpm	XE490DK Operating weight: 46100-49500kg Bucket capacity: 2.5m³ Rated power: 280/2000kw/rpm	XE15E(Euro V) Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power: 9.8/2300kw/rpm	XE18E Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power: 11.8/2300kw/rpm
XE27E Operating weight: 2780kg Bucket capacity: 0.06m³ Rated power: 15.5/2400kw/rpm	XE35E Operating weight: 4200kg Bucket capacity: 0.12m³ Rated power: 18.2/2200kw/rpm	XE55E Operating weight: 5700kg Bucket capacity: 0.16m³ Rated power: 31.2/2200kw/rpm	XE150E Operating weight: 14800kg Bucket capacity: 0.61m³ Rated power: 90/2200kw/rpm	XE155ECR Operating weight: 16600kg Bucket capacity: 0.65m³ Rated power: 90/2200kw/rpm	XE220E Operating weight: 2100-2300kg Bucket capacity: 1.05m³ Rated power: 129/2100kw/rpm	XE260E Operating weight: 25870kg Bucket capacity: 1.2m³ Rated power: 142/2000kw/rpm	XE300E Operating weight: 32700kg Bucket capacity: 1.4m³ Rated power: 166/2000kw/rpm
XE360E Operating weight: 36800kg Bucket capacity: 1.6m³ Rated power: 213/2000kw/rpm	XE18U Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power: 11.8/2300kw/rpm	XE27U Operating weight: 2780kg Bucket capacity: 0.06m³ Rated power: 15.5/2400kw/rpm	XE35U(Tier 4f)(XE35E Euro V) Operating weight: 4220kg Bucket capacity: 0.12m³ Rated power: 18.2/2200kw/rpm	XE55U(Tier 4f)(XE55E Euro V) Operating weight: 5700kg Bucket capacity: 0.16m³ Rated power: 31.2/2200kw/rpm	XE75U(Tier 4f) Operating weight: 7400kg Bucket capacity: 0.3m³ Rated power: 45/2200kw/rpm	XE150U(Tier 4f)(XE150E Euro V) Operating weight: 14800kg Bucket capacity: 0.61m³ Rated power: 90/2200kw/rpm	XE155UCR Operating weight: 16600kg Bucket capacity: 0.65m³ Rated power: 90/2200kw/rpm

● WHEEL EXCAVATOR

XE210U Operating weight: 2100-2300kg Bucket capacity: 1.2m³ Rated power: 142/2000kw/rpm	XE250U(Tier 4f)(XE250E Euro V) Operating weight: 25700kg Bucket capacity: 1.2m³ Rated power: 142/2000kw/rpm	XE300U(Tier 4f)(XE300E Euro V) Operating weight: 32700kg Bucket capacity: 1.4m³ Rated power: 186/2000kw/rpm	XE360U(Tier 4f) Operating weight: 36800kg Bucket capacity: 1.6m³ Rated power: 213/2000kw/rpm	XE60WD Operating weight: 5900kg Bucket capacity: 0.23m³ Rated power: 41.5/2400kw/rpm	XE150WB Operating weight: 14000kg Bucket capacity: 0.58m³ Rated power: 104/2000kw/rpm	XE160W(Euro IV) Operating weight: 15500kg Bucket capacity: 0.58m³ Rated power: 104/2000kw/rpm	XE210WB Operating weight: 20500kg Bucket capacity: 0.88m³ Rated power: 135/2050kw/rpm
--	--	--	---	---	--	--	--

● WHEEL LOADER

XC9350 Bucket Load: 18.0m³ Rated Load: 35000kg Rated Power: 570kW Operating Weight: 15000kg Max. Breakout: 961kN Overall Dimension(LxWxH): 1725x565x6524mm	LW156FV Bucket Load: 0.7m³ Rated Load: 2500kg Rated Power: 55kW Operating Weight: 4550kg Max. Breakout: 44kN Overall Dimension(LxWxH): 6140 x 2050 x 2930 mm	LW160FV Bucket Load: 1m³ Rated Load: 4500kg Rated Power: 60/73kW Operating Weight: 4900kg Max. Breakout: 44kN Overall Dimension(LxWxH): 6150 x 2050 x 2930 mm	LW180FV Bucket Load: 1m³ Rated Load: 4500kg Rated Power: 60kW Operating Weight: 5000kg Max. Breakout: 55kN Overall Dimension(LxWxH): 6100 x 2050 x 3010 mm	LW180K(V) Bucket Load: 1.1m³ Rated Load: 5000kg Rated Power: 58.8/60kW Operating Weight: 5200kg Max. Breakout: 55kN Overall Dimension(LxWxH): 6030 x 2050 x 2950mm	LW200FV Bucket Load: 1.2m³ Rated Load: 7000kg Rated Power: 65kW Operating Weight: 6400kg Max. Breakout: 58kN Overall Dimension(LxWxH): 6600 x 2170 x 3110mm	LW200K(V) Bucket Load: 1.1m³ Rated Load: 2000kg Rated Power: 65.2kW Operating Weight: 6300kg Max. Breakout: 60kN Overall Dimension(LxWxH): 6355 x 2060 x 2950mm	LW30FN Bucket Load: 2.1m³ Rated Load: 3300kg Rated Power: 92kW Operating Weight: 10800kg Max. Breakout: 120kN Overall Dimension(LxWxH): 7470 x 2462 x 3320 mm
LW350KN Bucket Load: 2.0m³ Rated Load: 3500kg Rated Power: 105kW Operating Weight: 11200kg Max. Breakout: 124kN Overall Dimension(LxWxH): 7300 x 2550 x 3230 mm	LW400KN Bucket Load: 2.4m³ Rated Load: 4000kg Rated Power: 129kW Operating Weight: 14000kg Max. Breakout: 150kN Overall Dimension(LxWxH): 7800 x 2718 x 3480mm	XC938 Bucket Load: 1.9m³ Rated Load: 2600kg Rated Power: 59kW Operating Weight: 13500kg Max. Breakout: 130kN Overall Dimension(LxWxH): 7705x2462x3495mm	XC948 Bucket Load: 2.4m³ Rated Load: 4500kg Rated Power: 168kW Operating Weight: 16500kg Max. Breakout: 140kN Overall Dimension(LxWxH): 7825x2500x3495mm	XC958 Bucket Load: 3.1m³ Rated Load: 5000kg Rated Power: 178kW Operating Weight: 19300kg Max. Breakout: 170kN Overall Dimension(LxWxH): 8005x2500x3495mm	XC968 Bucket Load: 3.5m³ Rated Load: 5000kg Rated Power: 178kW Operating Weight: 20600kg Max. Breakout: 205kN Overall Dimension(LxWxH): 8405x2525x3495mm	XC978 Bucket Load: 4.2m³ Rated Load: 7000kg Rated Power: 231kW Operating Weight: 25000kg Max. Breakout: 210kN Overall Dimension(LxWxH): 8853x2500x3697mm	XC998 Bucket Load: 5.4m³ Rated Load: 9000kg Rated Power: 261kW Operating Weight: 29500kg Max. Breakout: 260kN Overall Dimension(LxWxH): 9400x2500x3730mm
ZL50GN Bucket Load: 3.2m³ Rated Load: 5500kg Rated Power: 162kW Operating Weight: 17150kg Max. Breakout: 176kN Overall Dimension(LxWxH): 8300x2996x3515mm	LW600KN Bucket Load: 3.5m³ Rated Load: 6000kg Rated Power: 175/178kW Operating Weight: 20200kg Max. Breakout: 205kN Overall Dimension(LxWxH): 8500 x 3220 x 3515mm	LW700HV Bucket Load: 4.2m³ Rated Load: 7000kg Rated Power: 210kW Operating Weight: 23500kg Max. Breakout: 210kN Overall Dimension(LxWxH): 8900 x 3200 x 3620mm	LW700KN Bucket Load: 4.2m³ Rated Load: 7000kg Rated Power: 228kW Operating Weight: 23800kg Max. Breakout: 200kN Overall Dimension(LxWxH): 8900 x 3200 x 3620mm	LW800HV Bucket Load: 4.8m³ Rated Load: 8000kg Rated Power: 250kW Operating Weight: 25500kg Max. Breakout: 240kN Overall Dimension(LxWxH): 9100 x 3430 x 3620mm	LW800KN Bucket Load: 4.8m³ Rated Load: 8000kg Rated Power: 261kW Operating Weight: 25800kg Max. Breakout: 250kN Overall Dimension(LxWxH): 9400 x 3430 x 3770mm	LW900KN Bucket Load: 5.5m³ Rated Load: 9000kg Rated Power: 281kW Operating Weight: 28500kg Max. Breakout: 290kN Overall Dimension(LxWxH): 9400 x 3430 x 3770mm	LW1200KN Bucket Load: 6.5m³ Rated Load: 12000kg Rated Power: 418kW Operating Weight: 35500kg Max. Breakout: 394kN Overall Dimension(LxWxH): 12337x3690x4193mm

● CLAPPER LOADER

LW180KVJ Min. Clamping Diameter: 800mm Rated Load: 1800kg Rated Power: 58.5kW Operating Weight: 6330kg Overall Dimension(LxWxH): 6415x1960x2950mm	LW200KVJ Min. Clamping Diameter: 800mm Rated Load: 1600kg Rated Power: 66.2kW Operating Weight: 6700kg Overall Dimension(LxWxH): 6415x1960x2950mm	LW330KVJ Min. Clamping Diameter: 800mm Rated Load: 3000kg Rated Power: 92kW Operating Weight: 11220kg Overall Dimension(LxWxH): 7455x2462x3320mm	LW550FN Min. Clamping Diameter: 1000mm Rated Load: 5000kg Rated Power: 162kW Operating Weight: 17700kg Overall Dimension(LxWxH): 8565x2950x3515mm	ZL50GN Min. Clamping Diameter: 1000mm Rated Load: 5000kg Rated Power: 162kW Operating Weight: 17700kg Overall Dimension(LxWxH): 8685x2950x3515mm	LW600KN Min. Clamping Diameter: 1000mm Rated Load: 6000kg Rated Power: 178kW Operating Weight: 20880kg Overall Dimension(LxWxH): 8955x2960x3515mm	LW700KVJ Min. Clamping Diameter: 1000mm Rated Load: 7000kg Rated Power: 225kW Operating Weight: 23800kg Overall Dimension(LxWxH): 9235x3200x3620mm	LW800KN Min. Clamping Diameter: 1000mm Rated Load: 8000kg Rated Power: 261kW Operating Weight: 28500kg Overall Dimension(LxWxH): 10005x3210x3785mm
---	---	--	---	--	---	--	--

● SKIDDER

XC360
Capacity: 178kWh
Operating Weight: 19700kg
Max. Traction: 171kN
Logging Winch Diameter
(Cable Type): 27mm
Blade Cutting Depth: 456mm
Overall Dimension(LxWxH):
7840 x 3220 x 3550mm

LW500KV-LNG
Bucket Load: 3m³
Rated Load: 5000kg
Rated Power: 162kW
Operating Weight: 17500kg
Max. Breakout: 176kN
Overall Dimension(LxWxH):
8322x2996x3515mm

LW600KV-LNG
Bucket Load: 3.5m³
Rated Load: 6000kg
Rated Power: 191kW
Operating Weight: 21500kg
Max. Breakout: 205kN
Overall Dimension(LxWxH):
8780x3220x3515mm

ZL20E
Bucket Load: 0.0m³
Rated Load: 2000kg
Rated Power: 56.2kW
Operating Weight: 6300kg
Max. Breakout: 130kN
Overall Dimension(LxWxH):
5960x1960x2550mm

ZL30E
Bucket Load: 1.8m³
Rated Load: 3000kg
Rated Power: 92kW
Operating Weight: 10900kg
Max. Breakout: 170kN
Overall Dimension(LxWxH):
7470x2462x2965mm

ZL50E
Bucket Load: 2.5m³
Rated Load: 5000kg
Rated Power: 162kW
Operating Weight: 18900kg
Max. Breakout: 170kN
Overall Dimension(LxWxH):
8190x3000x2875mm

● SIDE DUMPING

ZL50GN
Bucket Load: 2.5m³
Rated Load: 4500kg
Rated Power: 162kW
Operating Weight: 19200kg
Max. Breakout: 150kN
Overall Dimension(LxWxH):
8515 x 3028 x 3515mm

● SKID-STEER LOADER

XC740K
Bucket Load: 0.45m³
Rated Load: 750kg
Rated Power: 36.8/35.5kW
Operating Weight: 3080kg
Overall Dimension(LxWxH):
3310x1800x1950mm

XC750K
Bucket Load: 0.45m³
Rated Load: 900kg
Rated Power: 50/50.2kW
Operating Weight: 3400kg
Overall Dimension(LxWxH):
3360x1800x1950mm

XC760K
Bucket Load: 0.6m³
Rated Load: 1080kg
Rated Power: 51.3kW
Operating Weight: 3450kg
Overall Dimension(LxWxH):
3510x2000x1950mm

XC770K
Bucket Load: 0.8m³
Rated Load: 1250kg
Rated Power: 74.9kW
Operating Weight: 3700kg
Overall Dimension(LxWxH):
3750x2000x1950mm

LW440FN
Bucket Load: 2.4m³
Rated Load: 4000kg
Rated Power: 129kW
Operating Weight: 14000kg
Max. Breakout: 150kN
Overall Dimension(LxWxH):
7800 x 2718 x 3480mm

ZL50GN
Bucket Load: 2.5m³
Rated Load: 5000kg
Rated Power: 162kW
Operating Weight: 17500kg
Max. Breakout: 170kN
Overall Dimension(LxWxH):
8290 x 3000 x 3515mm

● BACKHOE LOADER

XC870K
Bucket Load: 1m³
Rated Load: 2500kg
Rated Power: 70/72/74/82kW
Operating Weight: 7500kg
Max. Breakout: 53kN
Overall Dimension(LxWxH):
7440x2350x3450mm

XC870HK
Bucket Load: 1m³
Rated Load: 2500kg
Rated Power: 70/72/74/82kW
Operating Weight: 8200kg
Max. Breakout: 53kN
Overall Dimension(LxWxH):
6075x2350x3520mm

● TELESCOPIC HANDLER

XC6-300TK
Max. Lift Capacity: 3000kg
Lifting Height: 8950mm
Rated Load: 90kN
Operating Weight: 7450kg
Max. Traction (without load):
≥ 55kN
Overall Dimension(LxWxH):
4420 x 2550 x 2400mm
Fork Length: 1000mm

XC6-3514K
Max. Lift Capacity: 3500kg
Lifting Height: 13700mm
Rated Load: 70/74.9kW
Max. Traction (without load):
≥ 55kN
Overall Dimension(LxWxH):
6380 x 2500 x 2740mm
Fork Length: 1200mm

XC6-4517K
Max. Lift Capacity: 4500kg
Lifting Height: 16700mm
Rated Load: 82/74.9kW
Max. Traction (without load):
≥ 55kN
Overall Dimension(LxWxH):
6960 x 2500 x 2850mm
Fork Length: 1200mm

● CRAWLER DOZER

TY130
Rated Power:
36.5kW
Operating Weight:
18,310kg 32,782kg
Blade Width x Height:
3.275m x 1.148m
18° x 2°
Dimensions(L x W x H):
5,820mm x 3,275mm x 2,974mm
17° x 19° x 19°
(with straight tilt blade and three-shank ripper)

TY160
Rated Power:
121kW 189P 1,850rpm
Operating Weight:
18,600kg
Blade Width x Height:
3.410m x 1.149m
11° x 2°
Dimensions(L x W x H):
6,430mm x 3,410mm x 3,015mm
17° x 17° x 17°
(with straight tilt blade and three-shank ripper)

TY230
Rated Power:
108kW 2,000rpm
Operating Weight:
28,800kg 62,051kg
Blade Width x Height:
3.725m x 1.390m
12° x 2°
Dimensions(L x W x H):
6,790mm x 3,725mm x 3,472mm
22° x 47° x 11°
(with straight tilt blade and three-shank ripper and ROPS)

TY320
Rated Power:
264kW 2189P 2,000rpm
Operating Weight:
38,800kg 85,538kg
Blade Width x Height:
4.130m x 1.590m
12° x 2°
Dimensions(L x W x H):
8,915mm x 4,130mm x 3,602mm
28° x 17° x 12°
(with straight tilt blade and three-shank ripper and ROPS)

● HAMMERHEAD TOWER CRANE



XGA6013-8S
Jib length/Tip load:
6000mm/1300kg
Rated Load Moment: 1000KN · m
Max. Lifting Capacity: 8000kg

XGA6012-6S
Jib length/Tip load:
6000mm/1200kg
Rated Load Moment: 800KN · m
Max. Lifting Capacity: 6000kg

XGA6020-8S
Jib length/Tip load:
6000mm/1500kg
Rated Load Moment: 1250KN · m
Max. Lifting Capacity: 8000kg

XGA615-8S
Jib length/Tip load:
6500mm/1500kg
Rated Load Moment: 1250KN · m
Max. Lifting Capacity: 8000kg

● LUFFING TOWER CRANE



XGL80-6S
Jib length/Tip load:
4000mm/600kg
Rated load moment: 800KN · m
Max. Lifting Capacity: 6000kg

XGL190-14S
Jib length/Tip load:
5500mm/1400kg
Rated load moment: 1900KN · m
Max. Lifting Capacity: 14000kg

XGL1600II
Jib length/Tip load:
7800mm/600kg
Rated Load Moment: 16000KN · m
Max. Lifting Capacity: 10000kg

XGL1800
Jib length/Tip load:
6300mm/1800kg
Rated load moment: 19000KN · m
Max. Lifting Capacity: 13000kg

XGTL120(5016-8

● WHEEL BULLDOZER



DL210
Shovel Capacity:3.9m³
Rated Power:162kW
Operating Weight:16300kg
Overall Dimension(LxWxH):
7430x354x3515mm



DL350
Shovel Capacity:8.88m³
Rated Power:261kW
Operating Weight:29500kg
Max.Breakout:158kN
Overall Dimension(LxWxH):
7950x434x3805mm



DL560
Shovel Capacity:10.0m³
Rated Power:418kW
Operating Weight:47000kg
Max.Breakout:158kN
Overall Dimension(LxWxH):
10335x520x415mm

MINING MACHINERY

● MINING EXCAVATOR



XE7000
Operation Weight: 672000kg
Bucket Capacity: 30-36m³
Output Power:
2 x 1193/1800kw/rpm



XE7000E
Operation Weight: 68000kg
Bucket Capacity: 30-36m³
Output Power:
2 x 1250/1489kw/rpm



XE700D
Operation Weight: 69000kg
Bucket Capacity: 2.4-4.6m³
Output Power:
336/1800kw/rpm



XE700DF
Operation Weight: 70000kg
Bucket Capacity: 2.4-4.6m³
Output Power:
328/2100kw/rpm



XE700DA
Operation Weight: 69000kg
Bucket Capacity: 2.4-4.6m³
Output Power:
336/1800kw/rpm



XE750D
Operation Weight: 75000kg
Bucket Capacity: 3.3-5.3m³
Output Power:
385/1700kw/rpm



XE750G
Operation Weight: 75000kg
Bucket Capacity: 3.8-5.3m³
Output Power:
403/2100kw/rpm



XE900D
Operation Weight: 89600kg
Bucket Capacity: 3.5-6.0m³
Output Power:
399/2100kw/rpm



XE950D
Operation Weight: 93000kg
Bucket Capacity: 4.6-7.0m³
Output Power:
903/1800kw/rpm



XE950DA
Operation Weight: 91000kg
Bucket Capacity: 4.6-7.0m³
Output Power:
447.5/2100kw/rpm



XE950G
Operation Weight: 91000kg
Bucket Capacity: 4.6-7.0m³
Output Power:
447/2000kw/rpm



XE1250
Operation Weight: 115000kg
Bucket Capacity: 5.2-8.5m³
Output Power:
567/1800kw/rpm



XE1250G
Operation Weight: 116000kg
Bucket Capacity: 5.2-8.5m³
Output Power:
567/1800kw/rpm



XE2000
Operation Weight: 192000kg
Bucket Capacity: 8-12m³
Output Power:
810/1800kw/rpm



XE2000E
Operation Weight: 192000kg
Bucket Capacity: 10.0-12.0m³
Output Power:
418/1400kw/rpm



XE2800E
Operation Weight: 29000kg
Bucket Capacity: 12-17m³
Output Power:
1200/1490kw/rpm



XE3000
Operation Weight: 28500kg
Bucket Capacity: 15-17m³
Output Power:
1193/1800kw/rpm



XE4000
Operation Weight: 39000kg
Bucket Capacity: 20-22m³
Output Power:
1491/1800kw/rpm



XE4000E
Operation Weight: 38000kg
Bucket Capacity: 21-23m³
Output Power:
1269-1788/2100-1485/2100kw/rpm



XDR70
rated power:567kw
Rated load:6500kg
Body capacity:25m³



XDR70T
rated power:338kw
Rated load:6500kg
Body capacity:30m³



XDR80T
rated power:353kw
Rated load:7600kg
Body capacity:35m³



XDR100T
rated power:588kw
Rated load:9100kg
Body capacity:52m³



XDE100S
Rated Capacity: 100m³
Rated Power:
570kW 1301HP 2100rpm
Maximum Gradeability: 0.2




XDE130
Rated Power: 970kW
Rated Payload: 120000kg
Body Capacity:
60m³



XDE200
Rated Power: 1510kW
Rated Payload: 180000kg
Body Capacity:
77m³



XDE240
Rated Power: 1854kW
Rated Payload: 230000kg
Body Capacity:
118m³



XDE320
rated power:2014kw
Rated load: 300000kg
Body capacity:
171m³



XDE400
Rated Power: 2800kW
Rated Payload: 350000kg
Body Capacity:
183m³



XDA30
Rated Power: 280kW
Rated Payload: 30000kg
Body Capacity:
13.6/14m³



XDA40
Rated Power: 350kW
Rated Payload: 35000kg
Body Capacity:
17.5/18.5m³



XDA45U
rated power:390kw
Rated load: 41000kg
Body capacity:20.5m³

● OFF-HIGHWAY WATERING CART



NXG5470DTS
Rated Power:340HP
Transmission: 9+1(6+1AT)
Rated Load: 30m³
Drive Type: 6x4



NXG5550DTS
Rated Power:375HP
Transmission: 9+1(6+1AT)
Rated Load: 40m³
Drive Type: 6x4



NXG5650DTS
Rated Power:375HP
Transmission: 6+1(1AT)
Rated Load: 40m³
Drive Type: 6x4



NXG5470D3T
Rated Power:340/380HP
Transmission: 9+1(6+1AT)
Rated Load: 30t
Drive Type: 6x4
Dump volume: 20m³



NXG5650DT
Rated Power:375HP
Transmission: 9+1(6+1AT)
Rated Load: 40t
Drive Type: 6x4
Dump volume: 25m³



NXG5760DT
Rated Power:420HP
Transmission: 9+1(6+1AT)
Rated Load: 50t
Drive Type: 6x4
Dump volume: 30m³



XGA5902D3T
Rated Power:430/460HP
Transmission: 8+1(6+1AT)
Rated Load: 60t
Drive Type: 6x4
Dump volume: 33m³



XG105
Rated Power:530HP
Transmission: 8+1
Rated Load: 75t
Drive Type: 6x4
Dump volume: 40m³

ROAD BUILDING MACHINERY

● STATIC THREE-DRUM ROLLER



3Y153J
Engine manufacturer: ShangChai
Rated Power: 86kw stageII
Operating weight: 12000-15000 kg
Working width: 2120 mm
Overall dimensions (mm) :
6224x2120x3297



3Y223J
Engine:ShangChai
Rated Power:
92kw stageII
Operating Weight: 19000-22000kg
Working Width:2130mm
Size: 6285 x 2420 x 3348



3Y263J
Engine:ShangChai
Rated Power:
92kw stageII
Operating Weight: 23000-26000kg
Working Width:2130mm
Size: 6285 x 2420 x 3348



CV83U
Engine:Cummins
Rated Power:
75kw stageII
Operating Weight: 3000kg
Working Width:1680mm
Size: 5355 x 1860 x 3040



XS103H
Engine:ShangChai
Rated Power:
100kw stageII
Operating Weight: 10500kg
Working Width:2130mm
Size: 6150 x 2300 x 3200



XS115
Engine:Cummins
Rated Power:
115kw stageIV
Operating Weight: 11000kg
Working Width:2130mm
Size: 5950x2300x2990




XS113(stageII/III)
Engine: Cummins
Rated Power:
89kw stageII/104kw stageIII
Operating Weight: 10800kg
Working Width:2130mm
Size: 5940 x 2300 x 3150



XS113E
Engine:Cummins
Rated Power:
93kw stageII
Operating Weight: 10400kg
Working Width:2130mm
Size: 5940 x 2300 x 3150



XS125
Engine:Cummins
Rated Power:
115kw stageV
Operating Weight: 12000kg
Working Width:2130mm
Size: 5990x2300x2990



XS123
Engine:Cummins
Rated Power:
93kw stageII
Operating Weight: 12000kg
Working Width:2130mm
Size: 5940 x 2300 x 3150



XS123(Australia)
Engine:Cummins
Rated Power:
104kw stageII
Operating Weight: 12000kg
Working Width:2130mm
Size: 5940 x 2300 x 3150




XS123H
Engine:ShangChai
Rated Power:
100kw stageII
Operating Weight: 12000kg
Working Width:2130mm
Size: 6150 x 2300 x 3200



CV123U
Engine: Cummins
Rated Power:
97kw TIER4F
Operating Weight: 12400kg
Working Width:2130mm
Size: 6150 x 2300 x 3150




XS133(CE)
Engine:Cummins
Rated Power:
104kw stageII
Operating Weight: 13000kg
Working Width:2130mm
Size: 5940 x 2300 x 3150




XS143
Engine:Cummins
Rated Power:
125kw stageII
Operating Weight: 14000kg
Working Width:2130mm
Size: 6200 x 2300 x 3200



XS143H
Engine:ShangChai
Rated Power:
100kw stageII
Operating Weight: 14000kg
Working Width:2130mm
Size: 6150 x 2300 x 3200



XS143J
Engine:ShangChai
Rated Power:
103kw stageII
Operating Weight: 14000kg
Working Width:2130mm
Size: 6150 x 2300 x 3200




XS163
Engine:Cummins
Rated Power:
125kw stageII
Operating Weight: 16000kg
Working Width:2130mm
Size: 6200 x 2300 x 3200



XS163H
Engine: ShangChai
Rated Power:
100kw stageII
Operating Weight: 16000kg
Working Width:2130mm
Size: 6150 x 2300 x 3200




XS163J
Engine:ShangChai
Rated Power:
103kw stageII
Operating Weight: 16000kg
Working Width:2130mm
Size: 6150 x 2300 x 3200




CV163U
Engine:Cummins
Rated Power:
128kw StageV/T4F
Operating Weight: 16000kg
Working Width:2130mm
Size: 6154 x 2300 x 3200




XS185S
Engine:Cummins
Rated Power:
142kw stageII
Operating Weight: 18000kg
Working Width:2130mm
Size: 6850x2300x3200




XS183
Engine:ShangChai
Rated Power:
140kw stageII
Operating Weight: 18000kg
Working Width:2130mm
Size: 6760 x 2330 x 3200



XS183J
Engine: ShangChai
Rated Power:
118kw stageII
Operating Weight: 18000kg
Working Width:2130mm
Size: 6220 x 2300 x 3200



XS205S
Engine:Cummins
Rated Power:
142kw stageII
Operating Weight: 20000kg
Working Width:2130mm
Size: 6950x2300x3200



XS203
Engine: ShangChai
Rated Power:
100kw stageII
Operating Weight: 20000kg
Working Width:2130mm
Size: 6760 x 2330 x 3200



XS203J (stageII/III)
Engine:ShangChai
Rated Power:
128kw stageII/128kw stageIII
Operating Weight: 20000kg
Working Width:2130mm
Size: 6220 x 2300 x 3200



XS225S
Engine: Cummins
Rated Power:
142kw stageII
Operating Weight: 22000kg
Working Width:2130mm
Size: 6990x2430x3200




XS225
Engine:ShangChai
Rated Power:
140kw stageII
Operating Weight: 22000kg
Working Width:2130mm
Size: 6990x2430x3200



XS225JS
Engine:ShangChai
Rated Power:
148kw stageII
Operating Weight: 22000kg
Working Width:2130mm
Size: 7000 x 2430 x 3200




XS223JE
Engine:ShangChai
Rated Power:
138kw stageII
Operating Weight: 22000kg
Working Width:2130mm
Size: 6220 x 2300 x 3200




XS265S
Engine:Cummins
Rated Power:
142kw stageIII
Operating Weight: 26000kg
Working Width:2170mm
Size: 6990x2470x3260



XS265
Engine:ShangChai
Rated Power:
162kw stageIII
Operating Weight: 26000kg
Working Width:2170mm
Size: 6990x2470x3260



XS265JS
Engine:ShangChai
Rated Power:
140kw stageIII
Operating Weight: 26000kg
Working Width:2170mm
Size: 7000 x 2470 x 3260



XS335
Engine:ShangChai
Rated Power:
103kw stageII
Operating Weight: 33500kg
Working Width:2400mm
Size: 7592 x 2800 x 3478

● PNEUMATIC ROLLER



XS365
Engine:ShangChai
Rated Power:
276kw stageII
Operating Weight: 36000kg
Working Width:2400mm
Size: 7592 x 2900 x 3478



XS395
Engine:ShangChai
Rated Power:
276kw stageII
Operating Weight: 39500kg
Working Width:2400mm
Size: 7592 x 3040 x 3478



XP103
Engine:ShangChai
Rated Power:
92kw stageII
Operating Weight: 10000kg
Working Width:2055mm
Size: 4780 x 2098 x 3340



XP163
Engine:ShangChai
Rated Power:
86kw stageII
Operating Weight: 16000kg
Working Width:2055mm
Size: 4800 x 2356 x 3330



● COLD PLANER

XM200KII Rated Power: 571kW 423hp Operating Weight: 33000kg Max. Milling Width: 2200mm Max. Milling Depth: 280mm Machine: 14500 x 2950 x 3100mm	XL22303K Rated Power: 519kW 735hp Operating Weight: 33500kg Max. Milling Width: 2300mm Max. Milling Depth: 300mm Size: 3340 x 3218 x 3197mm	XLZ2305K Rated Power: 571kW 761hp Operating Weight: 33500kg Max. Milling Width: 2300mm Max. Milling Depth: 300mm Size: 3340 x 3218 x 3197mm	XM405 Rated Power: 81kW 109hp Operating Weight: 5200kg Max. Milling Width: 400mm Max. Milling Depth: 120mm Machine: 2850 x 1470 x 2000mm	XM405S Rated Power: 81kW 109hp Operating Weight: 5200kg Max. Milling Width: 400mm Max. Milling Depth: 120mm Machine: 2850 x 1470 x 2000mm	XM503KL Rated Power: 92kW 122hp Operating Weight: 6500kg Max. Milling Width: 500mm Max. Milling Depth: 180mm Machine: 3320 x 1828 x 2300mm	XM503K Rated Power: 103kW 137hp Operating Weight: 7950kg Max. Milling Width: 500mm Max. Milling Depth: 210mm Machine: 6276 x 1828 x 2600mm	
XM1003K Rated Power: 163kW 217hp 2200rpm Operating Weight: 16800kg Max. Milling Width: 1000mm Max. Milling Depth: 300mm Machine: 7300 x 1085 x 980mm	XM1005H Rated Power: 164kW 218hp Operating Weight: 13900kg Max. Milling Width: 1000mm Max. Milling Depth: 200mm Machine: 4800 x 2295 x 2650mm	XM1005K Rated Power: 162kW 217hp Operating Weight: 14000kg Max. Milling Width: 1000mm Max. Milling Depth: 200mm Machine: 9580 x 2390 x 2720mm	XM1005F (tire) Rated Power: 154kW 205hp Operating Weight: 16000kg Max. Milling Width: 1000mm Max. Milling Depth: 200mm Machine: 9100 x 2010 x 2900mm	XM1005F (crawler) Rated Power: 154kW 205hp Operating Weight: 16500kg Max. Milling Width: 1000mm Max. Milling Depth: 200mm Machine: 9100 x 2010 x 2900mm	XM1205F Rated Power: 192kW 261hp 2200rpm Operating Weight: 20500kg Max. Milling Width: 1200mm Max. Milling Depth: 200mm Machine: 9550 x 2180 x 3000mm	XM1303K Rated Power: 171kW 231hp 2200rpm Operating Weight: 16950kg Max. Milling Width: 1300mm Max. Milling Depth: 200mm Machine: 4837 x 2846 x 3745mm	XM1305F Rated Power: 206kW 275hp Operating Weight: 22000kg Max. Milling Width: 1200mm Max. Milling Depth: 300mm Machine: 12700 x 2280 x 3000mm

● STABILIZERS, RECYCLER

XM2005 Rated Power: 110kW 567hp Operating Weight: 30500kg Max. Milling Width: 2000mm Max. Milling Depth: 300mm Machine: 12397 x 2500 x 3000mm	XM2005K Rated Power: 447kW 596hp Operating Weight: 30500kg Max. Milling Width: 2000mm Max. Milling Depth: 300mm Machine: 12537 x 2500 x 3000mm	XM200KII Rated Power: 470kW 630hp 2100rpm Operating Weight: 30500kg Max. Milling Width: 2000mm Max. Milling Depth: 220mm Machine: 14500 x 2090 x 3000mm	XLZ2103S Rated Power: 353kW 480hp 2100rpm Operating Weight: 21000kg Max. Milling Width: 2100mm/2300mm Max. Milling Depth: 250mm Size: 9232 x 3162 x 3450mm	XLZ2303 Rated Power: 447kW 596hp 2100rpm Operating Weight: 31000kg Max. Milling Width: 2300mm Max. Milling Depth: 250mm Size: 10193 x 3161 x 3480mm	XLZ2303S Rated Power: 393kW 530hp 2100rpm Operating Weight: 28800kg Max. Milling Width: 2100mm/2300mm Max. Milling Depth: 250mm Size: 9232 x 3262 x 3450mm
---	--	---	--	---	--

● TRUCK-MOUNTED INTELLIGENT ASPHALT DISTRIBUTOR

XL2103 Rated Power: 294kW 394hp 1900rpm Operating Weight: 15000kg Max. Milling Width: 2100mm Max. Milling Depth: 300mm Size: 8740 x 2785 x 3450mm	XL2503 Rated Power: 316kW 423hp 1900rpm Operating Weight: 16500kg Max. Milling Width: 2500mm Max. Milling Depth: 300mm Size: 8740 x 3060 x 3450mm	XLS403 Rated Power: 115kW 154HP 2600rpm Transport Weight: 7300kg Asphalt Spraying Width: 6000mm Dimensions(L x W x H): 7010 x 2100 x 2515mm	XLS603 Rated Power: 115kW 154HP 2600rpm Transport Weight: 9010kg Asphalt Spraying Width: 6000mm Dimensions(L x W x H): 7580 x 2325 x 2820mm	XLS803 Rated Power: 206kW 276HP 2300rpm Transport Weight: 12800kg Asphalt Spraying Width: 6000mm Dimensions(L x W x H): 8920 x 2500 x 3000mm	XL S1203 Rated Power: 228kW 306HP 1900rpm Transport Weight: 17700kg Asphalt Spraying Width: 6000mm Dimensions(L x W x H): 10330 x 2500 x 3220mm
---	---	--	--	---	--

● TRUCK-MOUNTED SLURRY SEAL PAVER

XF1003 Rated Power: 93kW 125HP 2200rpm Carrier: 228kW 306HP 1900rpm Transport Weight: 20500kg Paving Range(maximum): 2400~4200mm Transport Width: 3~15mm Dimensions(L x W x H): 11850 x 2496 x 3490mm
--

● ROAD MAINTENANCE TRUCK

XLV053TB Rated Power: 115kW 154hp Generator: 22kW Transport Weight: 8250kg Dimensions(L x W x H): 6600 x 2340 x 2950mm	XLY103TB Rated Power: 45kW Carrier: 165kW 221hp Generator: 12kW Transport Weight: 13750kg Dimensions(L x W x H): 8175 x 2495 x 3440mm	XLY103TC Rated Power: 165kW 221hp 2300rpm Hot Bitumen Tank Capacity: 40L Total Weight: 18000kg Dimensions(L x W x H): 8900 x 2500 x 3460mm
---	--	---

● TRUCK-MOUNTED SYNCHRONOUS ASPHALT & CHIP SEALER

XTF1003 Rated Power: 228kW 306HP 1900rpm Transport Weight: 19500kg Max. Seal Width: 4000mm Dimensions(L x W x H): 9920 x 2500 x 3790mm	XTF1203 Rated Power: 249kW 337HP 1900rpm Transport Weight: 25300kg Spraying Width: 4000mm Dimensions(L x W x H): 11980 x 2500 x 3890mm	XTF1403 Rated Power: 276kW 370HP 2000rpm Transport Weight: 24800kg Spraying Width: 4000mm Dimensions(L x W x H): 11980 x 2500 x 3890mm	XTF1403R Rated Power: 276kW 370HP 2000rpm Transport Weight: 22300kg Spraying Width: 4000mm Dimensions(L x W x H): 11300 x 2500 x 3985
---	---	---	--

● STABILIZED SOIL MIXING PLANT

XC300 Total Installed Power: 50kW Rated Payload: 2250/2800/2130kg Production Capacity: 300t/h Area: 44 x 14m ²	XC400 Total Installed Power: 107kW Rated Payload: 4370/3700/3700kg Production Capacity: 400t/h Area: 48 x 14m ²	XC500 Total Installed Power: 135kW Rated Payload: 6205/5270kg Production Capacity: 500t/h Area: 48 x 14m ²	XC600 Total Installed Power: 161kW Rated Payload: 8205/7060kg Production Capacity: 600t/h Area: 51 x 14m ²
XC700 Total Installed Power: 164kW Rated Payload: 10200/8700/8700kg Production Capacity: 700t/h Area: 51 x 14m ²	XC800 Total Installed Power: 222kW Rated Payload: 13190/13125kg Production Capacity: 800t/h Area: 53 x 14m ²	XC600S Total Installed Power: 243kW Rated Payload: 8205/7060kg Production Capacity: 600t/h Area: 55 x 14m ²	XC700S Total Installed Power: 247kW Rated Payload: 10200/8700/8700kg Production Capacity: 700t/h Area: 55 x 14m ²
XC800S Total Installed Power: 300kW Rated Payload: 13190/13125kg Production Capacity: 800t/h Area: 60 x 14m ²	XC1000S Total Installed Power: 389kW Rated Payload: 16190/16125kg Production Capacity: 1000t/h Area: 64 x 18m ²		

● ASPHALT MIXING PLANT

XAP325 Total Installed Power: 719kW 983hp Rated Payload: 320t/h Area: 1677m ²	XAP325H Total Installed Power: 873kW 1170hp Rated Payload: 320t/h Area: 2591m ²	XAP405 Total Installed Power: 927kW 1242hp Rated Payload: 400t/h Area: 1804m ²	XAP405H Total Installed Power: 1096kW 1469hp Rated Payload: 400t/h Area: 2624m ²	XAP245 Total Installed Power: 640kW 858hp Rated Payload: 240t/h Area: 1634m ²	XAP245H Total Installed Power: 760kW 1018hp Rated Payload: 240t/h Area: 2100m ²	
XARP325H Total Installed Power: 927kW 1242hp Rated Payload: 320t/h Area: 2684m ²	XCL300R Total Installed Power: 246kW 321hp Rated Payload: 300t/h Area: 49 x 37m ²	XRP80 Total Installed Power: 185kW 252hp Rated Payload: 80t/h Area: 352m ²	XRP130 Total Installed Power: 252kW 338hp Rated Payload: 130t/h Area: 890m ²	XRP163 Total Installed Power: 284kW 381hp Rated Payload: 160t/h Area: 890m ²	XFP20 Total Installed Power: 6kW 8hp Rated Payload: 20t/h	XFP30 Total Installed Power: 10kW 13hp Rated Payload: 30t/h

SANITARY ENGINEERING EQUIPMENT

● COMPLETE SET OF GARBAGE COLLECTION AND TRANSFER EQUIPMENT

XZJ5070ZYSQ5 Curb Weight: 4920/5090/5040kg Rated Payload: 2250/2800/2130kg Dustbin Volume: 6m ³ Vehicle Model: 6865/6750/6645 x 1950 x 2400mm	XZJ5120ZYSQ5 Curb Weight: 7530/8600/8600kg Rated Payload: 4370/3700/3700kg Dustbin Volume: 10m ³ Vehicle Model: 7510/7860/7810 x 2470 x 2990mm	XZJ5180ZYSQ5 Curb Weight: 9600kg Rated Payload: 6205/5270kg Dustbin Volume: 12.5m ³ Vehicle Model: 8405/8550 x 2500 x 2965mm	XZJ5250ZYSQ5 Curb Weight: 14570kg Rated Payload: 10300/10235kg Dustbin Volume: 15m ³ Vehicle Model: 10115 x 2500 x 3380/3600/3690mm	XZJ5021ZXXA5 Curb Weight: 1220kg Rated Payload: 10300/10235kg Max. Lifting Capacity: 1000kg Vehicle Model: 4175 x 1520 x 1930mm	XZJ5031ZXXA5 Curb Weight: 1500kg Rated Payload: 2000kg Max. Lifting Capacity: 1500kg Vehicle Model: 4370 x 1520 x 1940mm	XZJ5070ZXXQ5 Curb Weight: 2940kg Rated Payload: 3550kg Max. Lifting Capacity: 3000kg Vehicle Model: 4820 x 1880 x 2200mm
XZJ5160ZXXD5 Curb Weight: 7600kg Rated Payload: 8005kg Max. Lifting Capacity: 14000kg Vehicle Model: 7230 x 2490 x 3040mm	XZJ5250ZXXD5 Curb Weight: 11680kg Rated Payload: 13190/13125kg Max. Lifting Capacity: 20000kg Vehicle Model: 8350 x 2500 x 3140mm	XZJ5021ZDJA5 Max. Weight: 1800kg Curb Weight: 1370kg Rated Payload: 300kg Dustbin Volume: 3.1m ³ Vehicle Model: 4183 x 1600 x 1950mm	XZJ5120ZDJD5 Curb Weight: 12495kg Max. Weight: 6800kg Rated Payload: 5500kg Dustbin Volume: 18m ³ Vehicle Model: 6560 x 2480 x 3044mm	XZJ5160ZDJD5 Curb Weight: 15800kg Max. Weight: 8195kg Rated Payload: 7410kg Dustbin Volume: 18m ³ Vehicle Model: 7900 x 2490 x 3010mm	XZJ5070TCAQ5 Curb Weight: 4680/4380kg Rated Payload: 2490/2790kg Dustbin Volume: 4m ³ Vehicle Model: 5840 x 2100 x 2600mm	XZJ5120GXWD5 Max. Weight: 7295kg Curb Weight: 7295kg Rated Payload: 5000kg Dustbin Volume: 6.5m ³ Vehicle Model: 7110 x 2430 x 3050mm

● COMPLETE SET OF ROAD-CLEANING EQUIPMENT

XZJ5180GXWD5 Curb Weight: 8100kg Rated Payload: 9750kg Dustbin Volume: 12m ³ Vehicle Model: 7850 x 2500 x 3400mm	XZJ5071TSLQ5 Curb Weight: 5080kg Dustbin Volume: 5m ³ Water Tank Volume: 1300L Max. Sweeping Efficiency: 6000m ² /h Vehicle Model: 5730 x 1980 x 2520mm	XZJ5160TSLD5 Curb Weight: 10300kg Dustbin Volume: 8m ³ Water Tank Volume: 3000L Max. Sweeping Efficiency: 10500m ² /h Vehicle Model: 8115 x 2480 x 3160mm	XZJ5070TXXSQ5 Curb Weight: 5660kg Dustbin Volume: 3.2m ³ Water Tank Volume: 450L Max. Sweeping Efficiency: 6400m ² /h Vehicle Model: 6700 x 2090 x 2430mm	XZJ5100TXXSQ5 Curb Weight: 7250kg Dustbin Volume: 3.2m ³ Water Tank Volume: 520L Max. Sweeping Efficiency: 6400m ² /h Vehicle Model: 7000 x 2200 x 2690mm	XZJ5160TXXSD5 Curb Weight: 11980kg Dustbin Volume: 9m ³ Water Tank Volume: 900L Max. Sweeping Efficiency: 7000m ² /h Vehicle Model: 8612 x 2490 x 2980mm	XZJ5180TDYD5 Curb Weight: 11240/100m/11050/80m/kg The Standard Model/engine Power: 1532/10.5/155kW Gun Range: ≥ 100(100m) ≥ 80(80m) Water Tank Volume: ≥ 10m ³ Vehicle Model: 9650 x 2500 x 3530/11150 x 2500 x 3900mm
XZJ5251TDYD5 Curb Weight: 14900kg The Standard Model/engine Power: 1532/10.5/180kW Gun Range: ≥ 120m Water Tank Volume: ≥ 14m ³ Vehicle Model: 11150 x 2500 x 3900mm	XZJ5181GQXD5 Spray Water Cleaning Width: 2.5-3.5m Low-pressure Cleaning Flushing Width: ≥ 24m Water Gun Range: ≥ 38m Water Tank Volume: 9100m ³ Vehicle Model: 9372 x 2550 x 2960mm	XZJ5183GQXD5 XZJ5184GQXD5 Rated Payload: 18200/18135/18140/18345kg Dustbin Volume: 10.6/10.8m ³ Vehicle Model: 8050 x 2520 x 2920/8050 x 2520 x 2910mm	XZJ5250GQXD5 Curb Weight: 16460kg Rated Payload: 8410/8345kg Dustbin Volume: - Vehicle Model: 10525 x 2500 x 3785mm	XZJ5250GQXS5 Spray Water Cleaning Width: 2.5-3.5m Low-pressure Cleaning Flushing Width: ≥ 24m Water Gun Range: ≥ 38m Water Tank Volume: 11600m ³ Vehicle Model: 10500 x 2500 x 3270mm	XZJ5070GQXQ5 Curb Weight: 4910kg Clean Height Range: ≥ 0-1735mm Clean Width Range: ≥ 0-200mm Water Tank Volume: 500L Vehicle Model: 5980 x 2095 x 2625mm	XZJ5161GPSD5 Curb Weight: 7270kg Washing/Using Pressure: ≥ 300/10Pa Sprinkling Width: ≥ 15m Max. Suction Height: 6.5m Vehicle Model: 8780 x 2460 x 2840mm
XZJ5251GSSD5 Curb Weight: 11390kg Washing/Using Pressure: ≥ 300/10Pa Sprinkling Width: ≥ 16m Max. Suction Height: 6.5m Vehicle Model: 9980/9760 x 2500 x 3600/3690mm	SJDS1000A Curb Weight: 2400kg Dustbin Volume: 1m ³ Water Tank Volume: 160L Max. Sweeping Efficiency: 22000m ² /h Vehicle Model: 4370 x 1450 x 2190mm	XZJ5021TYHA5 Max. Total Design Mass: 1800kg Volume of Water Tank: 1000L Cleaning Width: 1.5m Max. Speed: 90km/h	XZJ5030XTYA5 Curb Weight: 1880kg Rated Payload: 1485kg Dustbin Volume: - Vehicle Model: 5980 x 1590 x 2275mm			

RAILWAY EQUIPMENT

● DRILLING JUMBO

TZ2A Coverage area(width x height, mm): 11212 x 7677 Max. coverage area(m ²): 72 Overall Weight (kg): 25000	TZ3A Coverage area(width x height, mm): 15725 x 13075 Max. coverage area(m ²): 180 Overall Weight (kg): 47500
---	---

● MINING HYDRAULIC TUNNELING DRILL JUMBOS

CYTJ45 Coverage area(width x height, mm): 6600 x 6630 Max. coverage area(m ²): 35 Overall Weight (kg): 13300
--

● UNDERGROUND LOAD HAUL DUMP

XUL202 Empty weight(t): 6.9 Rated load capacity(t): 2 Bucket capacity(m ³): 1 Transport dimension(L x W x H, mm): 6172 x 1300 x 1890 (1990)	XUL305 Empty weight(t): 13.2 Rated load capacity(t): 5 Bucket capacity(m ³): 2 Transport dimension(L x W x H, mm): 7120 x 1790 x 2010	XUL307 Empty weight(t): 18.5 Rated load capacity(t): 7 Bucket capacity(m ³): 3 Transport dimension(L x W x H, mm): 8790 x 2250 x 2285	XUL410 Empty weight(t): 28 Rated load capacity(t): 10 Bucket capacity(m ³): 6 Transport dimension(L x W x H, mm): 9700 x 2550 x 2185	XUL514D Empty weight(t): 38 Rated load capacity(t): 14 Bucket capacity(m ³): 6 Transport dimension(L x W x H, mm): 10730 x 2836 x 2570
--	--	--	---	---

PORT MACHINERY

● CONTAINER REACH STACKER

XCS4531K Rated lifting capacity: 45t Number of Stacking: 5-4-3 Rated power: 265/210kW/rpm	XCS1009K Rated lifting capacity: 10t Number of Stacking: 5 (8'6")-5(8'6")-4(8'6") Rated power: 164/230kW/rpm
---	--

● EMPTY CONTAINER HANDLER

XCH907K Maximum lifting capacity: 9 t Number of Stacking: 7 (8'6") Rated power: 185 kW/2200rpm	XCH908K Maximum lifting capacity: 9 t Number of Stacking: 8 (8'6") Rated power: 185 kW/2200rpm
--	--

● TELEHANDLERS

XTF12010K Rated lifting capacity: 12t Load Center: 600mm Max. Lifting Height: 9.52m Rated power: 129kW/2200rpm	XTF23010K Rated lifting capacity: 23t Load Center: 900mm Max. Lifting Height: 9.55m Rated power: 142kW/2200rpm
---	---

● FORKLIFT

XCF1612K/1606K Rated lifting capacity: 16t Load Center: 1200/600mm Max. Lifting Height: 4000mm Rated power: 142kW/2300rpm	XCF2512K Rated lifting capacity: 25t Load Center: 1200mm Max. Lifting Height: 4000mm Rated power: 185kW/2200rpm	XCF3512K Rated lifting capacity: 35t Load Center: 1200mm Max. Lifting Height: 4000mm Rated power: 185kW/2200rpm
--	--	--

CONCRETE MACHINERY

● TRUCK-MOUNTED CONCRETE BOOM PUMP

● V7 DURABLE SERIES



 <p>HB30V Chassis: SINOTRUK Drive Type: 4x2 Vertical Reach: 29.6m Theor. Concrete Output: 100m³/h</p>	 <p>HB37V Chassis: SINOTRUK Drive Type: 4x2 Vertical Reach: 36.5m Theor. Concrete Output: 130m³/h</p>	 <p>HB37V Chassis: SINOTRUK Drive Type: 6x4 Vertical Reach: 36.5m Theor. Concrete Output: 130m³/h</p>	 <p>HB39V Chassis: SINOTRUK Drive Type: 6x4 Vertical Reach: 39.1m Theor. Concrete Output: 130m³/h</p>	 <p>HB43V Chassis: SINOTRUK Drive Type: 6x4 Vertical Reach: 43m Theor. Concrete Output: 170m³/h</p>	 <p>HB50V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 49.1m Theor. Concrete Output: 170m³/h</p>	 <p>HB52V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 51.5m Theor. Concrete Output: 170m³/h</p>	 <p>HB55V Chassis: SINOTRUK/BENZ Drive Type: 8x4 Vertical Reach: 57.5m Theor. Concrete Output: 170m³/h</p>
--	---	---	---	---	---	--	--

● TRAILER-MOUNTED CONCRETE LINE PUMP

 <p>HB62V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 61.1m Theor. Concrete Output: 170m³/h</p>	 <p>HB67V Chassis: BENZ Drive Type: 10x4 Vertical Reach: 66.1m Theor. Concrete Output: 170m³/h</p>
---	--

 <p>HBT5006V Theor. Concrete Output: 50m³/h Max. Pump Pressure: 8Mpa Max. Pump Height: 100m</p>	 <p>HBT6013V Theor. Concrete Output: 40/65m³/h Max. Pump Pressure: 8/13Mpa Max. Pump Height: 150m</p>	 <p>HBT9018V Theor. Concrete Output: 60/115m³/h Max. Pump Pressure: 9/18Mpa Max. Pump Height: 250m</p>
---	---	--

● TRUCK-MOUNTED CONCRETE SPRAYING MACHINE

 <p>HPC30VI Chassis: SINOTRUK Drive Type: 4x2 Max. Spraying Height: 18m Theor. Concrete Output: 30m³/h</p>	 <p>HPS30VI Chassis: Made by XCMG Drive Type: 4x4 Max. Spraying Height: 17m Theor. Concrete Output: 30m³/h</p>
--	--

● VEHICLE-MOUNTED CONCRETE LINE PUMP

 <p>HBC10022V Chassis: SINOTRUK Theor. Concrete Output: 55/100m³/h Max. Pump Pressure: 12/22Mpa Max. Pump Height: 300m</p>

● SELF-LOADING CONCRETE MIXER





 <p>SLM4V Drive Type: 4x4 Mixing Capacity: 4m³ Discharging Type: Front</p>
--

● TRUCK-MOUNTED CONCRETE MIXER

 <p>G04V Chassis: XCMG Drive Type: 4x2 Mixing Capacity: 4m³</p>	 <p>G06V Chassis: SINOTRUK Drive Type: 4x2/6x4 Mixing Capacity: 6m³</p>	 <p>G08V Chassis: XCMG/SINOTRUK Drive Type: 6x4 Mixing Capacity: 8m³</p>	 <p>G10V Chassis: XCMG/SINOTRUK Drive Type: 6x4 Mixing Capacity: 10m³</p>	 <p>G12V Chassis: XCMG/SINOTRUK Drive Type: 6x4 Mixing Capacity: 12m³</p>	 <p>G16V Chassis: SINOTRUK Drive Type: 8x4 Mixing Capacity: 16m³</p>
---	---	--	--	---	--

● CONCRETE BATCHING PLANTS

● STANDARD

 <p>HZS90V Nominal Capacity of Mixer: 1500L Theor. Continuous Production efficiency: 90m³/h</p>	 <p>HZS120V Nominal Capacity of Mixer: 2000L Theor. Continuous Production efficiency: 120m³/h</p>
 <p>HZS180V Nominal Capacity of Mixer: 3000L Theor. Continuous Production efficiency: 180m³/h</p>	 <p>HZS270V Nominal Capacity of Mixer: 4500L Theor. Continuous Production efficiency: 270m³/h</p>


● PROJECT

 <p>HZS60VG Nominal Capacity of Mixer: 1000L Theor. Continuous Production efficiency: 60m³/h</p>	 <p>HZS90VG Nominal Capacity of Mixer: 1500L Theor. Continuous Production efficiency: 90m³/h</p>	 <p>HZS120VG Nominal Capacity of Mixer: 2000L Theor. Continuous Production efficiency: 120m³/h</p>	 <p>HZS180VG Nominal Capacity of Mixer: 3000L Theor. Continuous Production efficiency: 180m³/h</p>
---	---	---	--

● MOBILE

































 <p>HZS40VY Nominal Capacity of Mixer: 750L Theor. Continuous Production efficiency: 60m³/h</p>	 <p>HZS60VY Nominal Capacity of Mixer: 1000L Theor. Continuous Production efficiency: 90m³/h</p>	 <p>HZS75VY Nominal Capacity of Mixer: 1500L Theor. Continuous Production efficiency: 105m³/h</p>
--	---	--

● CONCRETE PLACING BOOM

 <p>HGP32 Max. Placing Radius: 32m Max. Freestanding Height: 21m Motor Power: 22kW</p>
--

SPECIAL VEHICLE

● AERIAL WORKING PLATFORM

 <p>XG0607DC Maximum Working Height: 5.9m Maximum Load Capacity: 240kg Total Weight: 900kg</p>	 <p>XG0807HD Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1550kg</p>	 <p>XG0807HDW Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1580kg</p>	 <p>XG0807DC Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1550kg</p>	 <p>XG0807DCW Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1580kg</p>	 <p>XG1008DC Maximum Working Height: 10m Maximum Load Capacity: 230kg Total Weight: 2150kg</p>	 <p>XG1012DC Maximum Working Height: 10m Maximum Load Capacity: 450kg Total Weight: 2620kg</p>	 <p>XG1008HD Maximum Working Height: 10m Maximum Load Capacity: 230kg Total Weight: 2150kg</p>
 <p>XG1012HD Maximum Working Height: 10m Maximum Load Capacity: 450kg Total Weight: 2620kg</p>	 <p>XG1212HD Maximum Working Height: 12m Maximum Load Capacity: 320kg Total Weight: 2900kg</p>	 <p>XG1212DC Maximum Working Height: 12m Maximum Load Capacity: 320kg Total Weight: 2500kg</p>	 <p>XG1412HD Maximum Working Height: 13.8m Maximum Load Capacity: 320kg Total Weight: 3100kg</p>	 <p>XG1412DC Maximum Working Height: 13.4m Maximum Load Capacity: 320kg Total Weight: 3100kg</p>	 <p>XG1523RT Maximum Working Height: 15m Maximum Load Capacity: 680kg Total Weight: 6400kg</p>	 <p>XG1614HD Maximum Working Height: 15.8m Maximum Load Capacity: 350kg Total Weight: 3700kg</p>	 <p>XG1614DC Maximum Working Height: 15.8m Maximum Load Capacity: 350kg Total Weight: 3700kg</p>
 <p>XG1823RT Maximum Working Height: 18m Maximum Load Capacity: 680kg Total Weight: 8000kg</p>	 <p>XGS22 Maximum Working Height: 22m Maximum Load Capacity: 460kg Total Weight: 12300kg</p>	 <p>XGS24 Maximum Working Height: 24m Maximum Load Capacity: 340kg Total Weight: 12500kg</p>	 <p>XGS28 Maximum Working Height: 28.2m Maximum Load Capacity: 340kg Total Weight: 16600kg</p>	 <p>XGS28K Maximum Working Height: 28.2m Maximum Load Capacity: 460kg Total Weight: 17200kg</p>	 <p>XGS34 Maximum Working Height: 34.2m Maximum Load Capacity: 340kg Total Weight: 18400kg</p>	 <p>XGS34K Maximum Working Height: 34.2m Maximum Load Capacity: 460kg Total Weight: 19300kg</p>	 <p>XGS40 Maximum Working Height: 40.2m Maximum Load Capacity: 340kg Total Weight: 20600kg</p>
 <p>XGS40K Maximum Working Height: 40.2m Maximum Load Capacity: 460kg Total Weight: 21400kg</p>	 <p>XGS43 Maximum Working Height: 43.3m Maximum Load Capacity: 450kg Total Weight: 22000kg</p>	 <p>XGS50K Maximum Working Height: 50m Maximum Load Capacity: 460kg Total Weight: 24400kg</p>	 <p>XGS58 Maximum Working Height: 58.6m Maximum Load Capacity: 450kg Total Weight: 27900kg</p>	 <p>XGA16 Maximum Working Height: 16.05m Maximum Load Capacity: 230kg Total Weight: 7100kg</p>	 <p>XGA16AC Maximum Working Height: 15.8m Maximum Load Capacity: 227kg Total Weight: 6500kg</p>	 <p>XGA20 Maximum Working Height: 20.4m Maximum Load Capacity: 230kg Total Weight: 11000kg</p>	 <p>XGA20AC Maximum Working Height: 20.7m Maximum Load Capacity: 350kg Total Weight: 9100kg</p>

● FIRE TRUCK

 <p>XGA20K Maximum Working Height: 20.6m Maximum Load Capacity: 350kg Total Weight: 3900kg</p>	 <p>XGA22K Maximum Working Height: 22m Maximum Load Capacity: 460kg Total Weight: 12460kg</p>	 <p>XGA26 Maximum Working Height: 26.38m Maximum Load Capacity: 230kg Total Weight: 17800kg</p>	 <p>DG100 Rated Working Height: 100m Rated load on platform: 400kg</p>	 <p>DG88C1 Rated Working Height: 88m Rated load on platform: 400kg</p>	 <p>DG54K3 Rated Working Height: 54m Rated load on platform: 500kg</p>	 <p>DG34G1 Rated Working Height: 34m Rated load on platform: 500kg</p>	 <p>JP62G1 Rated Working Height: 62m Container Capacity: 7500kg</p>
 <p>JP35C1 Rated Working Height: 35m Container Capacity: 8400kg</p>	 <p>JP20G1 Rated Working Height: 20m Container Capacity: 2000kg</p>	 <p>YT60K1 Rated Working Height: 60m Rated load on platform: 270kg</p>	 <p>YT53G1 Rated Working Height: 53m Rated load on platform: 300kg</p>	 <p>YT32G1 Rated Working Height: 32m Rated load on platform: 450kg</p>	 <p>PM180G1 rated reach: > 95m Container Capacity: 18100kg</p>	 <p>PM120G2 rated reach: > 75m Container Capacity: 12000kg</p>	 <p>PM80G2 rated reach: > 65m Container Capacity: 7800kg</p>
 <p>AP50F5 rated reach: > 65m Container Capacity: 4200kg</p>	 <p>AP50G1 Container load: 4260kg rated reach: > 60m</p>	 <p>JY120G1 Winch rated tension: 70KN Maximum work range: 8m</p>	 <p>QC700 Hydraulic tail-plate Lifting Weight: 2000kg Lighting power: 41000W</p>	 <p>JY10 Max. Gradeability: > 30% Throw distance: 20-30m Throw amount: 80m³/h Chute Rotation: 275°</p>	 <p>JY16 Hydraulic Speed: 294/1900kW/h/m Boom Turning angle: ±135° Boom Expansion length: 1500mm Tank volume: 8.2m³</p>	 <p>JY18 Shearing Force: 244kN Maximum Lifting Capacity of Main hook: 16000kg</p>	 <p>JY20 Shearing Force: 500kN Maximum Lifting Capacity: 6300kg</p>

PILING MACHINERY

● ROTARY DRILLING RIG


 <p>XR80E Rated Power: 116kW Max. Drilling Diameter: 100mm Max. Drilling Depth: 24m Operating weight: 27000kg</p>	 <p>XR130E Rated Power: 169kW Max. Drilling Diameter: 130mm Max. Drilling Depth: 45000kg</p>	 <p>XR150D II Rated Power: 150kW Max. Drilling Diameter: 150mm Max. Drilling Depth: 56m Operating weight: 49000kg</p>	 <p>XR160E Rated Power: 150kW Max. Drilling Diameter: 150/130mm Max. Drilling Depth: 53m Operating weight: 53000kg</p>	 <p>XR180D II Rated Power: 194kW Max. Drilling Diameter: 180/160mm Max. Drilling Depth: 60m Operating weight: 60000kg</p>	 <p>XR200E Rated Power: 212kW Max. Drilling Diameter: 180mm Max. Drilling Depth: 85m Operating weight: 63000/65000kg</p>	 <p>XR220D II Rated Power: 242kW Max. Drilling Diameter: 220mm Max. Drilling Depth: 67m Operating weight: 76000kg</p>	 <p>XR240E Rated Power: 270kW Max. Drilling Diameter: 220/200mm Max. Drilling Depth: 70m Operating weight: 84000kg</p>
 <p>XR280D II Rated Power: 298kW Max. Drilling Diameter: 250/220mm Max. Drilling Depth: 88m Operating weight: 85800/86000kg</p>	 <p>XR280E Rated Power: 315kW Maximum drilling diameter: 250mm Maximum drilling depth: 94m Operating weight: 106000kg</p>	 <p>XR320D Rated Power: 298kW Max. Drilling Diameter: 250mm Max. Drilling Depth: 91m Operating weight: 95000kg</p>	 <p>XR360 Rated Power: 298kW Max. Drilling Diameter: 250mm Max. Drilling Depth: 92m Operating weight: 92000kg</p>	 <p>XR360E Rated Power: 345kW Maximum drilling diameter: 260/230mm Maximum drilling depth: 103m Operating weight: 115000kg</p>	 <p>XR400E Rated Power: 373kW Max. Drilling Diameter: 280/250mm Max. Drilling Depth: 103m Operating weight: 118000kg</p>	 <p>XR400D Rated Power: 373kW Max. Drilling Diameter: 280/220mm Max. Drilling Depth: 108m Operating weight: 132000kg</p>	 <p>XR450E Rated Power: 399kW Maximum drilling diameter: 300/280mm Maximum drilling depth: 114m Operating weight: 165000kg</p>
 <p>XR460D Rated Power: 447kW Max. Drilling Diameter: 300/230mm Max. Drilling Depth: 120m Operating weight: 168000kg</p>	 <p>XR550D Rated Power: 447kW Max. Drilling Diameter: 350mm Max. Drilling Depth: 132m Operating weight: 185000kg</p>	 <p>XR600E Rated Power: 399kW Maximum drilling diameter: 4000mm Maximum drilling depth: 150m Operating weight: 225000kg</p>	 <p>XR700E Rated Power: 567kW Maximum drilling diameter: 4000mm Maximum drilling depth: 160m Operating weight: 240000kg</p>	 <p>XR800E Rated Power: 641kW Max. Drilling Diameter: 4000mm Max. Drilling Depth: 150m Operating weight: 310000kg</p>	 <p>XG500E Rated Power: 298/1900kW/rpm Wall depth: 75m Wall thickness: 300-1500mm Maximum holding force: 600KN Total weight: 105t</p>	 <p>XG600E Rated Power: 298/1900kW/rpm Wall depth: 80/105m Wall thickness: 500-1500mm Maximum holding force: 600KN Total weight: 128t</p>	 <p>XG700E Rated Power: 315/1900kW/rpm Wall depth: 80/105m Wall thickness: 800-1500mm Maximum holding force: 700KN Total weight: 128t</p>

● UNDERGROUND DIAPHRAGM WALL HYDRAULIC GRAB

--

NON-EXCAVATION MACHINERY

● PIPE JACKING MACHINE

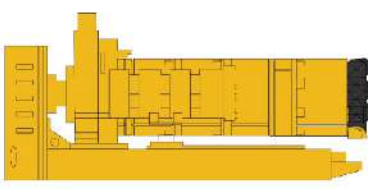

XDN500HL
Jacking shield motor power(kW):18.5
Jacking shield torque(N·m):19
Jacking shield rotating speed(r/min):7
Main jacking oil cylinder thrust(kN):1000 × 2

XDN1500
Jacking shield motor power(kW):30 × 2
Jacking shield torque(N·m):275
Jacking shield rotating speed(r/min):4.2
Main jacking oil cylinder thrust(kN):2000 × 4

Mars600
Jacking shield motor power(kW):22
Jacking shield torque(N·m):15.3
Jacking shield rotating speed(r/min):13.7
Main jacking oil cylinder thrust(kN):1800

XDN1800
Jacking shield motor power(kW):30 × 2
Jacking shield torque(N·m):412
Jacking shield rotating speed(r/min):4.2
Main jacking oil cylinder thrust(kN):2800 × 4

XDN600HL
Jacking shield motor power(kW):18.5
Jacking shield torque(N·m):22
Jacking shield rotating speed(r/min):6
Main jacking oil cylinder thrust(kN):1000 × 2

MARS450
Jacking shield motor power(kW):22
Jacking shield torque(N·m):9.75
Jacking shield rotating speed(r/min):16.8
Main jacking oil cylinder thrust(kN):1000 × 2

XDN800HL
Jacking shield motor power(kW):30
Jacking shield torque(N·m):50
Jacking shield rotating speed(r/min):4.7
Main jacking oil cylinder thrust(kN):1500 × 2

Mars500
Jacking shield motor power(kW):22
Jacking shield torque(N·m):15.3
Jacking shield rotating speed(r/min):13.7
Main jacking oil cylinder thrust(kN):1800

XDN1200HL
Jacking shield motor power(kW):45
Jacking shield torque(N·m):195
Jacking shield rotating speed(r/min):5
Main jacking oil cylinder thrust(kN):2000 × 2

● HORIZONTAL DIRECTIONAL DRILLING RIG

<p>XZ120E Rated power (kW/r/min): 81/2200 Maximum push/pull force(kN): 130 Maximum rotation torque (N·m): 3000 Weight(t): 4.5 Overall size (mm): 4500 × 1680 × 2170</p>	<p>XZ150E Rated power(kW/r/min):81/2200 Maximum push/pull force(kN):420/500 Maximum rotation torque(N·m):5400 Weight(t): 7.5 Overall size(mm):5900 × 1850 × 2100</p>	<p>XZ200 Rated power (kW/r/min): 113/2200 Maximum push/pull force(kN): 225 Maximum rotation torque (N·m): 6350 Weight(t): 8.5 Overall size (mm): 5900 × 2250 × 2400</p>	<p>XZ230E Rated power(kW/r/min):113/2200 Maximum push/pull force(kN):230/270 Maximum rotation torque(N·m):8500 Weight(t):8.5 Overall size(mm):6100 × 2250 × 2300</p>	<p>XZ280E Rated power(kW/r/min):133/2200 Maximum push/pull force(kN):230/270 Maximum rotation torque(N·m):9000 Weight(t):8.5 Overall size(mm):6100 × 2250 × 2300</p>	<p>XZ320E Rated power (kW/r/min): 154/2200 Maximum push/pull force (kN): 345 Maximum rotation torque (N·m): 12600 Weight (t): 10 Overall size (mm): 6200 × 2280 × 2450</p>
<p>XZ360E Rated power(kW/r/min):154/2200 Maximum push/pull force(kN):370 Maximum rotation torque(N·m):13200 Weight(t):10.5 Overall size(mm):6200 × 2280 × 2450</p>	<p>XZ420E Rated power (kW/r/min): 179/2200 Maximum push/pull force (kN): 420/500 Maximum rotation torque (N·m): 18500 Weight (t): 11.2 Overall size (mm): 6500 × 2250 × 2450</p>	<p>XZ450/P Rated power(kW/r/min):194/2200 Maximum push/pull force(kN):450/960 Maximum rotation torque(N·m):27000 Weight(t): 13.3/13.5 Overall size(mm):8800 × 2280 × 2610</p>	<p>XZ720E Rated power(kW/r/min):221/2100 Maximum push/pull force(kN):5300 Maximum rotation torque(N·m):35000 Weight(t):8.5 Overall size(mm):5900 × 1850 × 2100</p>	<p>XZ960E Rated power(kW/r/min):221/2100 Maximum push/pull force(kN):570 Maximum rotation torque(N·m):35000 Weight(t):16.2 Overall size(mm):10650 × 2450 × 2600</p>	<p>XZ1350 Rated power (kW/r/min): 264/2100 Maximum push/pull force (kN): 1795 Maximum rotation torque (N·m): 50500 Weight (t): 25 Overall size (mm): 11680 × 2760 × 3540</p>
<p>XZ2200 Rated power (kW/r/min): 2 × 242/2100 Maximum push/pull force (kN): 2200 Maximum rotation torque (N·m): 75000 Weight (t): 31 Overall size (mm): 12700 × 3030 × 3500</p>	<p>XZ3600 Rated power (kW/r/min): 2 × 264/2100 Maximum push/pull force (kN): 3600 Maximum rotation torque (N·m): 123000 Weight (t): 48 Overall size (mm): 17500 × 3200 × 3550</p>	<p>XZ5600 Rated power(kW/r/min):2 × 354/1900 Maximum push/pull force(kN):5300 Maximum rotation torque(N·m):150000 Weight(t):59 Overall size(mm):20000 × 3400 × 3770</p>	<p>XZ6600 Rated power(kW/r/min):2 × 565/1850 Maximum push/pull force(kN):6600 Maximum rotation torque(N·m):210000 Weight(t):70 Overall size(mm):19000 × 3200 × 3600</p>	<p>XZ11000 Rated power(kW/r/min):3 × 410/1900 Maximum push/pull force(kN):11000 Maximum rotation torque(N·m):240000 Weight(t):83 Overall size(mm):20400 × 3200 × 3600</p>	

MINING MACHINERY

● EBZ SERIES ROADHEADER

<p>EBZ135L Total power (kW): 210 Positioning cutting height (mm): 4000 Positioning cutting width (mm): 4840 Overall weight (t): 42</p>	<p>EBZ160 Total power (kW): 250 Positioning cutting height (mm): 4800/4500 Positioning cutting width (mm): 5400/5900 Overall weight (t): 47</p>	<p>EBZ160L Total power (kW): 250 Positioning cutting height (mm): 4100 Positioning cutting width (mm): 4800 Overall weight (t): 45</p>	<p>EBZ160E Total power (kW): 250 Positioning cutting height (mm): 4900 Positioning cutting width (mm): 5500 Overall weight (t): 49</p>	<p>EBZ200L Total power (kW): 310 Positioning cutting height (mm): 4550 Positioning cutting width (mm): 5650 Overall weight (t): 53</p>	<p>EBZ200E Total power (kW): 310 Cutting range height (mm): 4700 Cutting range width (mm): 5700 Total weight (t): 58</p>	<p>EBZ200A Total power (kW): 325 Positioning cutting height (mm): 5630/4550 Positioning cutting width (mm): 6260/5700 Overall weight (t): 58</p>
<p>EBZ200R Total power (kW): 347 Positioning cutting height (mm): 4500 Maximum feeding force of the feed system (kN): 6040 Overall weight (t): 80</p>	<p>EBZ200M-2H Total power (kW): 310 Cutting range height (mm): 4700 Cutting range width (mm): 5700 Total weight (t): 85</p>	<p>EBZ230 Total power (kW): 377 Positioning cutting height (mm): 4800 Positioning cutting width (mm): 6040 Overall weight (t): 80</p>	<p>EBZ260 Total power (kW): 410.5 Positioning cutting height (mm): 5030 Positioning cutting width (mm): 5550 Overall weight (t): 85</p>	<p>EBZ260M-2H Total power (kW): 392 Cutting range height (mm): 5150 Cutting range width (mm): 5200 Total weight (t): 100</p>	<p>EBZ260M-4H Total power (kW): 392 Cutting range height (mm): 5150 Cutting range width (mm): 5200 Total weight (t): 100</p>	<p>EBZ320 Total power (kW): 565.5 Positioning cutting height (mm): 5700 Positioning cutting width (mm): 7100 Overall weight (t): 120</p>

● XTR SERIES BOOM-TYPE ROADHEADER

<p>XTR4/180 Cutter Motor Power: 180/110kW Cutting height: 4.2m Cutting width: 4.3m Operating weight Max.: 47000kg</p>	<p>XTR4/230 Cutter Motor Power: 230/135 Cutting range height (mm): 4600 Cutting range width (mm): 5100 Total weight (t): 60</p>	<p>XTR6/260 Cutter Motor Power: 260/200kW Cutting height: 6.2m Cutting width: 6.0m Operating weight Max.: 92000kg</p>	<p>XTR6/320 Total power (kW): 320/240 Cutting range height (mm): 6600 Cutting range width (mm): 6000 Total weight (t): 125</p>	<p>XTR7/360 Cutter Motor Power: 360/280kW Cutting height: 7.2m Cutting width: 7.2m Operating weight Max.: 145000kg</p>	<p>XTR8/500 Total power (kW): 500 Cutting range height (mm): 8520 Cutting range width (mm): 10230 Total weight (t): 218</p>
--	--	--	---	---	--

● DEEP (WATER) WELL DRILLING RIG (ENERGY EXPLORATION MACHINERY)

<p>XSL3/160 Maximum passing diameter (mm): 0-330 Drilling depth (m): 300 (0-89) Maximum lifting force of feeding system (kN): 160 Maximum feeding force of the feed system (kN): 80 Overall weight (t): 9.7</p>	<p>XSL5/280 Maximum passing diameter (mm): 0-400 Drilling depth (m): 500 (0-89) Maximum lifting force of feeding system (kN): 280 Maximum feeding force of the feed system (kN): 120 Overall weight (t): 12</p>	<p>XSL7/360 Maximum passing diameter (mm): 0-500 Drilling depth (m): 700 (0-89) Maximum lifting force of feeding system (kN): 360 Maximum feeding force of the feed system (kN): 150 Overall weight (t): 13.5</p>	<p>XSL12/600 Maximum passing diameter (mm): 0-500 Drilling depth (m): 1200 (0-89) Maximum lifting force of feeding system (kN): 600 Maximum feeding force of the feed system (kN): 260 Overall weight (t): 47.5</p>
<p>XSL20/1000 Maximum passing diameter (mm): 0-610 Drilling depth (m): 2000 (0-114) Maximum lifting force of feeding system (kN): 1000 Maximum feeding force of the feed system (kN): 260 Overall weight (t): 47.5</p>	<p>XSC5/280 Maximum passing diameter (mm): 0-500 Drilling depth (m): 500 (0-89) Maximum lifting force of feeding system (kN): 280 Maximum feeding force of the feed system (kN): 120 Overall weight (t): 22</p>	<p>XSC30/1200 Maximum passing diameter (mm): 0-820 Drilling depth (m): 2000 (0-114) Maximum lifting force of feeding system (kN): 1200 Maximum feeding force of the feed system (kN): 260 Overall weight (t): 55</p>	

HEAVY-DUTY TRUCK

● CARGO TRUCK

<p>XGA1160 Driving type: 4x2 Engine: 160/220/240/270HP Transmission: 6/8/9 GVW:18T Overall size: 9.2 × 2.5 × 3.9m</p>	<p>XGA1250 Driving type: 6x4 Engine: 240/270HP Transmission: 8/9 GVW:25T Overall size: 9.73 × 2.5 × 2.88m</p>	<p>XGA1310 Driving type: 6x4 Engine: 350/375/400/460HP Transmission: 8/9/12 GVW:31T Overall size: 12 × 2.5 × 3.9m</p>
--	--	--

● DUMP TRUCK

<p>XGA3160 Driving type: 4x2 Engine: 225HP Transmission: 8 GVW: 20-25t Overall size: 7 × 2.5 × 3.15m</p>	<p>XGA3250 Driving type: 6x4 Engine: 330/336/371/375/420/430HP Transmission: 9/10/12/16 GVW:25T Overall size: 8.6 × 2.5 × 3.5m</p>	<p>XGA3310 Driving type: 6x4 Engine: 371/375/460HP Transmission: 9/10/12 GVW:31T Overall size: 10 × 2.5 × 3.4m</p>
---	---	---

● TRACTOR

<p>XGA4180 Driving type: 4x2 Engine: 270/371/375/460HP Transmission: 9/12/16 GVW:18T Overall size: 6.7 × 2.5 × 3.9m</p>	<p>XGA4250 Driving type: 6x4 Engine: 350/371/375/430/460/500/550HP Transmission: 9/12/16 GVW:31T Overall size: 6.7 × 2.5 × 3.9m</p>
--	--

EMERGENCY RESCUE VEHICLE

<p>XJY240Z Max. Travel Speed: 100km/h Max. Load Ability: 60% Max. Lifting Capacity: 15000kg Max. Grabbing Capacity: 300kg Max. Grabbing Capacity: 1000kg</p>	<p>XJY240WQ Max. Travel Speed: 100km/h Max. Lifting Capacity: 6000kg Max. Dragging Capacity: 3600kg Bucket Capacity: 0.4m³ Breaking Obstacle Width: 2840mm</p>	<p>XPM10 Max. Travel Speed: 100km/h Farthest Throw Distance: 22m Max. Throw Amount: 150m³/h</p>	<p>XQC700 Max. Travel Speed: 100km/h Max. Grade Ability: 60% Max. Dragging Capacity: 3000kg Lighting Power: 4 × 100W Equipment Category: 700</p>	<p>XZJ5250TWC26 Suction Deep: 30m Suction Length: 100m Suction Diameter: 203mm</p>	<p>XJY18D Platform Rated Load: 220kg Rated Working Height: 1800mm Max. Lifting Capacity: 2500kg Switchable Steering Mode: 5 Outline Size: 5000 × 2000 × 3400mm</p>
---	---	--	---	---	---

OTHERS

● TRACTOR

<p>KAT1004 Rated Power: 73.5kW Drive Type: 4X4 Max. Pulling Force: 24kN Max. Lifting Capacity: 25kN</p>	<p>KAT1104 Rated Power: 82kW Drive Type: 4X4 Max. Pulling Force: 28kN Max. Lifting Capacity: 25kN</p>	<p>KAT1204 Rated Power: 91kW Drive Type: 4X4 Max. Pulling Force: 28kN Max. Lifting Capacity: 31kN</p>	<p>KAT1254 Rated Power: 125kW Drive Type: 4X4 Max. Pulling Force: 31kN Max. Lifting Capacity: 31kN</p>	<p>KAT1304 Rated Power: 137.5kW Drive Type: 4X4 Max. Pulling Force: 30kN Max. Lifting Capacity: 31kN</p>	<p>KAT1404 Rated Power: 105kW Drive Type: 4X4 Max. Pulling Force: 32kN Max. Lifting Capacity: 31kN</p>	<p>KAT1454 Rated Power: 107kW Drive Type: 4X4 Max. Pulling Force: 33kN Max. Lifting Capacity: 31kN</p>	
<p>KAT1504 Rated Power: 110kW Drive Type: 4X4 Max. Pulling Force: 34kN Max. Lifting Capacity: 38kN</p>	<p>KAT1604 Rated Power: 118kW 158HP Drive Type: 4X4 Max. Pulling Force: 36kN Max. Lifting Capacity: 38kN</p>	<p>KAT1804 Rated Power: 132kW Drive Type: 4X4 Max. Pulling Force: 40kN Max. Lifting Capacity: 36kN</p>	<p>KAT2004 Rated Power: 147kW Drive Type: 4X4 Max. Pulling Force: 43kN Max. Lifting Capacity: 40kN</p>	<p>KAT2204 Rated Power: 162kW Drive Type: 4X4 Max. Pulling Force: 48kN Max. Lifting Capacity: 50kN</p>	<p>KAT2404 Rated Power: 176kW Drive Type: 4X4 Max. Pulling Force: 52kN Max. Lifting Capacity: 50kN</p>	<p>KAT2804 Rated Power: 206kW Drive Type: 4X4 Max. Pulling Force: 60kN Max. Lifting Capacity: 50kN</p>	<p>KAT4404 Rated Power: 323kW Drive Type: 4X4 Max. Pulling Force: 94kN Max. Lifting Capacity: 38kN</p>

● AIR COMPRESSOR

<p>Stationary Diesel Engine Screw Air Compressors Rated Discharge Pressure: 0.7-2.5MPa Rated Air Displacement: 4-33m³/min Rated Power: 42-400kW</p>	<p>Stationary Electric Motor Screw Air Compressors Rated Discharge Pressure: 0.7-1.3MPa Rated Air Displacement: 0.81-43m³/min Rated Power: 7.5-250kW</p>	<p>Portable Diesel Engine Screw Air Compressors Rated Discharge Pressure: 0.7-2.2MPa Rated Air Displacement: 4-27m³/min Rated Power: 42-288kW</p>	<p>Portable Electric Motor Screw Air Compressors Rated Discharge Pressure: 0.8-2.2MPa Rated Air Displacement: 10-23m³/min Rated Power: 55-200kW</p>	<p>Electric Motor Reciprocating/Piston Air Compressors Rated Discharge Pressure: 0.7-1.25MPa Rated Air Displacement: 0.8-3.2m³/min Rated Power: 7.5-18.5kW</p>
--	---	--	--	---

● PORTABLE TRAILER LIGHT TOWER

CBP1500
Rated Voltage: 220V
Rated Power: 4000W
Running Time: 9hrs
Max. Mast Height: 10000mm

● PIPELAYER

PMG20
Rated Power: 120kW
Operating Weight: 22000kg
Max. Lifting Capacity: 25000kg

PMG40
Rated Power: 169kW
Operating Weight: 35000kg
Max. Lifting Capacity: 45000kg

PMG70
Rated Power: 239kW
Operating Weight: 49000kg
Max. Lifting Capacity: 70000kg

PMG90
Rated Power: 257kW
Operating Weight: 65000kg
Max. Lifting Capacity: 70000kg

● SHIELD TUNNELING MACHINE

Excavation Diameter: 6200-6800mm

● DIESEL GENERATOR SET

Cummins Diesel Engine Series
Gen-set Power: 50-300kW
Gen-set Capacity: 63-375kVA

SDEC Diesel Engine Series
Gen-set Power: 20-1240kW
Gen-set Capacity: 25-1550kVA

● ELECTRIC COUNTERBALANCED FORKLIFT TRUCK

<p>XCB-P15/XCB-L15 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 1500kg Max. elevating height: 3000mm Total weight: 3040kg</p>	<p>XCB-P18/XCB-L18 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 1800kg Max. elevating height: 3000mm Total weight: 3200kg</p>	<p>XCB-P20/XCB-L20 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 2000kg Max. elevating height: 3000mm Total weight: 3300kg</p>	<p>XCB-P25/XCB-L25 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 2500kg Max. elevating height: 3000mm Total weight: 4040kg</p>
<p>XCB-P30/XCB-L30 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 3000kg Max. elevating height: 3000mm Total weight: 5100kg</p>	<p>XCB-P35/XCB-L35 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 3000kg Max. elevating height: 3000mm Total weight: 5500kg</p>		

● ELECTRIC CARRIER TRUCK

<p>XCC-LW15 Rated elevating capacity: 1500kg Max. elevating height: 115mm Driving speed (full-load/non-load): 4.6/4.8 km/h Elevating speed (full-load/non-load): 20/25 mm/s Min. steering radius: 1330mm</p>	<p>XCC-LW20 Rated elevating capacity: 2000kg Max. elevating height: 115mm Driving speed (full-load/non-load): 4.8/5.2 km/h Elevating speed (full-load/non-load): 17/22 mm/s Min. steering radius: 1336mm</p>	<p>XCC-P20 Rated elevating capacity: 2000kg Max. elevating height: 120mm Driving speed (full-load/non-load): 7.5/8.0 km/h Elevating speed (full-load/non-load): 27/30 mm/s Min. steering radius: 1585mm</p>	<p>XCC-PW20 Rated elevating capacity: 2000kg Max. elevating height: 120mm Driving speed (full-load/non-load): 5.7/6.0 km/h Elevating speed (full-load/non-load): 22/30 mm/s Min. steering radius: 1490mm</p>
---	---	--	---

● ELECTRIC STACKER TRUCK SERIES

<p>XCS-P12 Rated elevating capacity: 1200kg Max. elevating height: 2900/3400 mm Driving speed (full-load/non-load): 6.0/6.0 km/h Elevating speed (full-load/non-load): 105/150 mm/s Min. steering radius: 1500mm</p>	<p>XCS-P15 Rated elevating capacity: 1500kg Max. elevating height: 2900/3400 mm Driving speed (full-load/non-load): 6.0/6.0 km/h Elevating speed (full-load/non-load): 105/150 mm/s Min. steering radius: 1540mm</p>	<p>XCS-P16 Rated elevating capacity: 1600kg Max. elevating height: 5500mm Driving speed (full-load/non-load): 6.0/7.0 km/h Elevating speed (full-load/non-load): 130/200 mm/s Min. steering radius: 1420mm</p>	<p>XCS-P20 Rated elevating capacity: 2000kg Max. elevating height: 4600mm Driving speed (full-load/non-load): 6.0/7.0 km/h Elevating speed (full-load/non-load): 130/200 mm/s Min. steering radius: 1500mm</p>
---	---	---	---

● ELECTRIC FORWARD-MOVING STACKER TRUCK

<p>XCF-PG15 Rated elevating capacity: 1500kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 280/320 mm/s Min. steering radius: 1885mm</p>	<p>XCF-PG20 Rated elevating capacity: 2000kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 1920mm</p>	<p>XCF-PG25 Rated elevating capacity: 2500kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 2050mm</p>	<p>XCF-P5G16 Rated elevating capacity: 1600kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 1750mm</p>	<p>XCF-P5G20 Rated elevating capacity: 2000kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 1760mm</p>
--	--	--	---	---